

HeliARCT™ LightScope® ZWP Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection
- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	D-HA
Government Requirements	Build America Buy America (BABA) compliant*


General Specifications

Armor Type	Corrugated steel
Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-free
Jacket Color	Black
Jacket Marking	Feet
Location of Manufacturing	Catawba, North Carolina
Subunit, quantity	2
Fibers per Subunit, quantity	12
Total Fiber Count	24

Dimensions

Buffer Tube/Subunit Diameter	2.5 mm 0.098 in
Diameter Over Jacket	9 mm 0.354 in

Representative Image

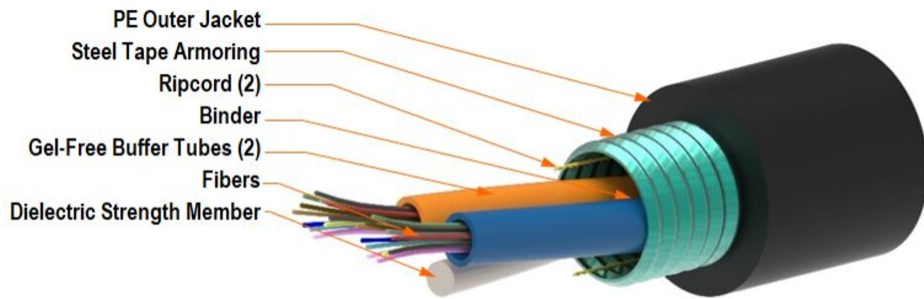

Material Specifications

Jacket Material PE

Mechanical Specifications

Minimum Bend Radius, loaded 135 mm | 5.315 in

Minimum Bend Radius, unloaded 92 mm | 3.622 in

Tensile Load, long term, maximum 400 N | 89.924 lbf

Tensile Load, short term, maximum 1334 N | 299.895 lbf

Compression 22 N/mm | 125.623 lb/in

Compression Test Method FOTP-41 | IEC 60794-1 E3

Flex 25 cycles

Flex Test Method FOTP-104 | IEC 60794-1 E6

Impact 2.94 N-m | 26.021 in lb

Impact Test Method FOTP-25 | IEC 60794-1 E4

Strain See long and short term tensile loads

Strain Test Method FOTP-33 | IEC 60794-1 E1

Twist 10 cycles

Twist Test Method FOTP-85 | IEC 60794-1 E7

Vertical Rise, maximum 529 m | 1,735.564 ft

Optical Specifications

Fiber Type G.652.D and G.657.A1, TeraSPEED® | OS2

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-87-640 EN 187105 Telcordia GR-20
Environmental Space	Aerial, lashed Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Qualification Method	ANSI/ICEA S-87-640
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	64 kg/km 43.006 lb/kft
---------------------	--------------------------

Included Products

CS-8W-LT – TeraSPEED® G652D/G657A1 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable