

Fiber indoor/outdoor cable, LazrSPEED®, Single Jacket All-Dielectric, Plenum Rated, Gel-Free, 144 fiber, Stranded Loose Tube, PVDF jacket, Multimode OM3, Black jacket color, Feet cable marking

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	P-LN


## General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Black
Jacket Marking	Feet
Subunit, quantity	12
Fibers per Subunit, quantity	12
Total Fiber Count	144

## Dimensions

Buffer Tube/Subunit Diameter	2.5 mm   0.098 in
Diameter Over Jacket	15.3 mm   0.602 in

## Representative Image

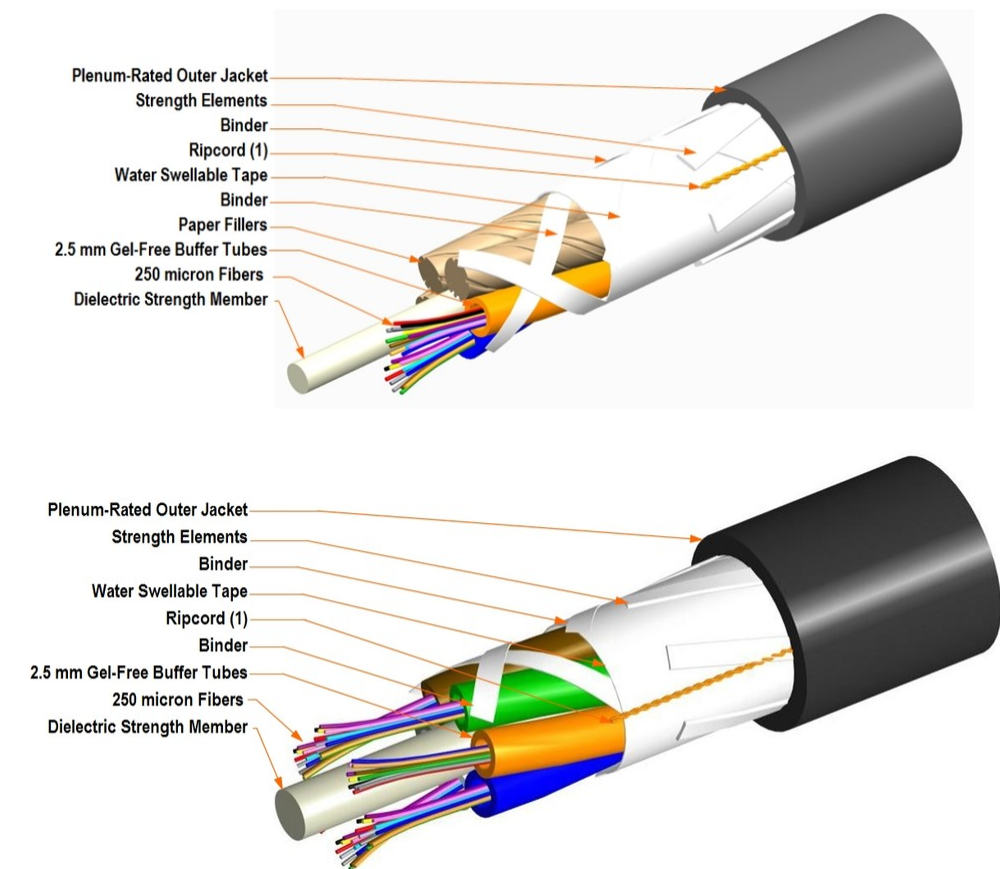

## Mechanical Specifications

Minimum Bend Radius, loaded	230 mm   9.055 in
Minimum Bend Radius, unloaded	153 mm   6.024 in
Tensile Load, long term, maximum	800 N   179.847 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	22 N/mm   125.623 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.41 N-m   39.032 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles

# 760095083 | P-144-LN-5L-F12BK/25D

Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	327 m   1,072.835 ft
Optical Specifications	
Fiber Type	OM3, LazrSPEED® 300   OM3, LazrSPEED® 300

## Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-104-696   EN 187105   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

Cable Freeze	-2 °C   28.4 °F
Cable Freeze Test Method	FOTP-98   IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

Cable weight	250 kg/km   167.992 lb/kft
--------------	----------------------------

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

CS-5L-LT – LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable