

FJ-1S5-PFNN



HELIAX® Discrete, outdoor rated, single mode G.657.A2 fiber cable assembly, End 1: Full-sized Hardened Connector (*OptiTap® Compatible) Female and End 2: HMFOC Plug (*OptiTip® compatible, Un-Pinned, terminated to Pin 6).

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Wireless Fiber Cable Assemblies
Product Brand	HELIAX®
Product Series	FJ
Ordering Note	ANDREW® non-standard product

General Specifications


Construction Type	Direct fiber tail
Interface, Connector A	HMFOC
Interface Body Style, connector A	Straight
Interface, Connector B	SC/UPC
Interface Body Style, connector B	Straight
Jacket Color	Black
Total Fibers, quantity	1

Dimensions

Cable Assembly Length Range (m)	1.5 – 50
Diameter Over Jacket	5.5 mm 0.217 in

Ordering Tree

FJ-1S5-PFNN

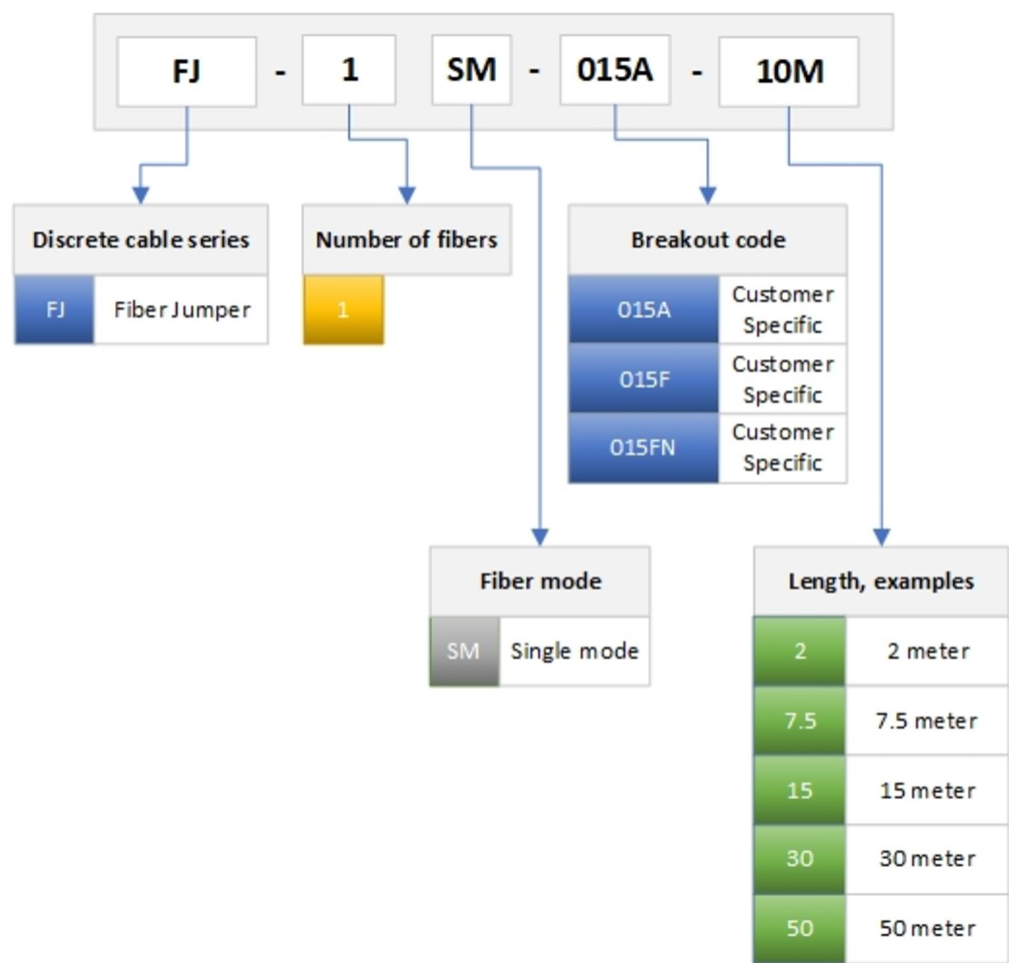

Material Specifications

Jacket Material Low Smoke Zero Halogen (LSZH)

Mechanical Specifications

Minimum Bend Radius, loaded 110 mm | 4.331 in

Minimum Bend Radius, unloaded 55 mm | 2.165 in

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2

Insertion Loss, typical note Insertion loss is measured at 1310 and 1550 nm

Insertion Loss, maximum, connector A 0.55 dB

Insertion Loss, maximum, connector B 0.55 dB

FJ-1S5-PFNN

Insertion Loss, typical	0.5
Return Loss, minimum, connector A	60 dB
Return Loss, minimum, connector B	65 dB

Environmental Specifications

Installation temperature	-10 °C to +70 °C (+14 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Environmental Space	Indoor/Outdoor
Jacket UV Resistance	UV stabilized

Packaging and Weights

Cable weight	48 kg/km 32.255 lb/kft
--------------	--------------------------

* Footnotes

Insertion Loss, typical note Insertion loss is measured at a room temp of +20°C (+68°F)