760259800 | IFEB-40WB4096C24SGJJNN000

IFEB40, Indoor Fiber Optic Wall mount Enclosure, Splice / Patch, LC/APC Pigtails and Adapters (96),Single Elemet Slim trays(24) Smouv, Feeder Cable Seal 4x15mm and 24x7mm drop seal(2), RAL 9010

- Compact, wall mountable fiber enclosures for indoor use
- Specifically designed for fast FTTH deployment and easy customer connection
- Configurable as splice only or connectorized solution
- Multiple and modular wrap around cable port sealing options to suit a wide range of cables
- Easy intergration of 900µm connectorised or 250µm splice splitters
- Single Element (SE), Single Slim Element (SLE) or Single Circuit (SC) tray options - Smouv and ANT
- Powered by NOVUX™

Product Classification

Regional Availability	EMEA
Portfolio	CommScope®
Product Type	Fiber wall box
Product Series	IFEB-40

General Specifications

Functionality	Patching | Splicing
Access	Front
Adapter Ports, quantity	96
Cable Ports, quantity	4
Drop Port, quantity	48
Enclosure Color	Pure White (RAL 9010)
Front Cover Type	Snap-on cover
Interface	LC/APC
Pigtails Included, quantity	96
Splice Tray Construction	SLE (Slim element tray for up to 12 primary coated fibers)
Splicing Capacity, maximum	288
Splicing Type	SMOUV

Dimensions

Height	425 mm | 16.732 in

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 28, 2025

760259800 | IFEB-40WB4096C24SGJJNN000

Height, with cover	500 mm | 19.685 in
Width	295 mm | 11.614 in
Depth	145 mm | 5.709 in

Dimension Drawing

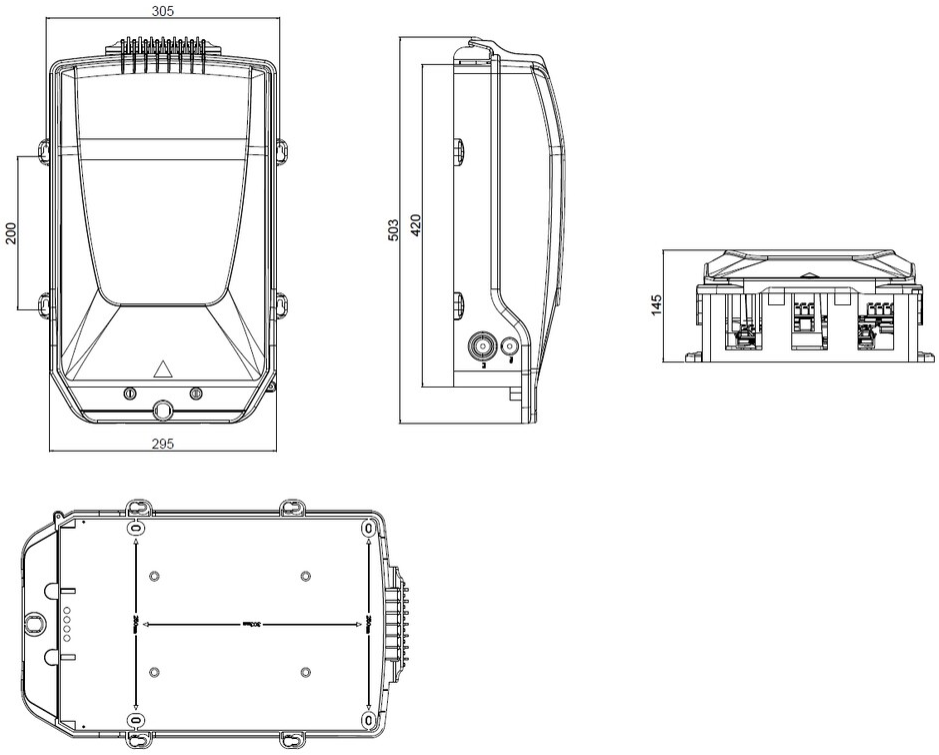

Ordering Tree

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 28, 2025

760259800 | IFEB-40WB4096C24SGJJNN000

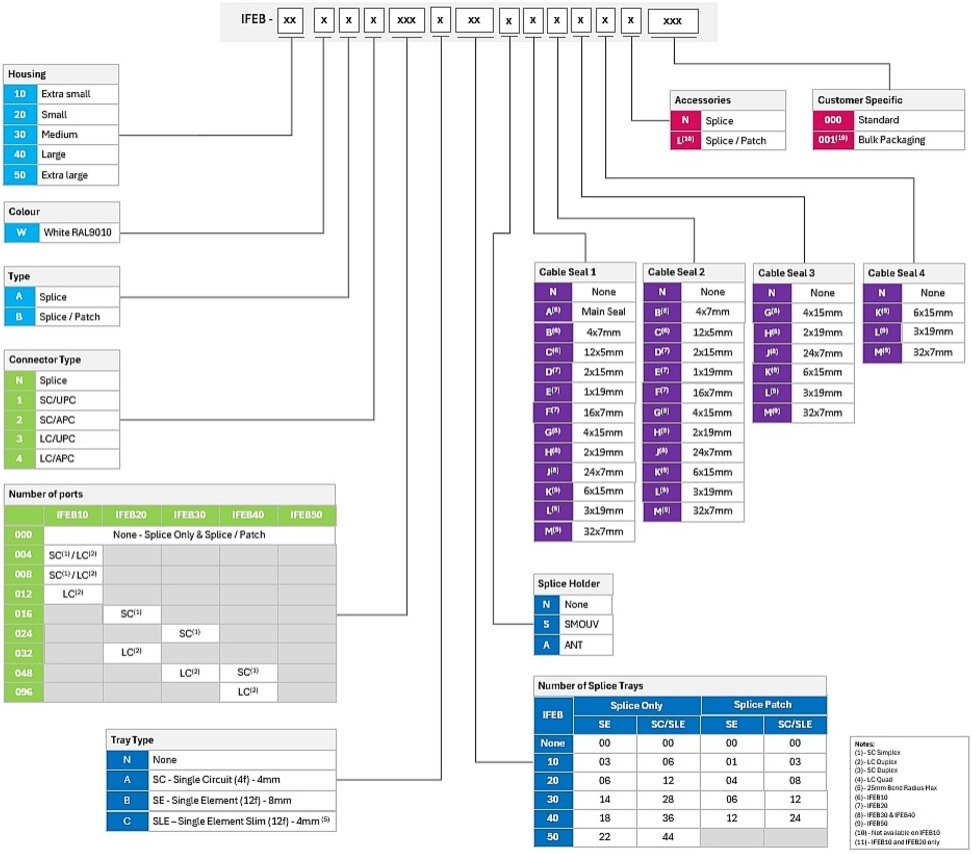

Environmental Specifications

Installation temperature	-5 °C to +45 °C (+23 °F to +113 °F)
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor
Flammability Rating	UL 94 V-0
Qualification Standards	IEC 60529, IP50 | IEC 61753-1 Ed.2 2018 - Category C

Packaging and Weights

Included	Adapters (24) | Box (1) | Drop Seal, 24x7 (2) | Feeder Seal, 4x15 (1) | SLE Smouv trays (24)
Packaging quantity	1
Packaging Type	Box

Regulatory Compliance/Certifications

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 28, 2025

760259800 | IFEB-40WB4096C24SGJJNN000

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

©2025 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 28, 2025