


810010471/DB/GS | B-048-LN-HY-F12NS/15G /8W048/1X24AWG/GS



Fiber OSP cable, LightScope® ZWP Blown Micro Single Jacket All-Dielectric, Tone Wire Outdoor, 48 fiber, Stranded Loose Tube Arid-Core™ Construction, Gel-filled, Singlemode G.652.D and G.657.A1, Feet jacket marking, Black jacket color

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	B-LN

General Specifications


Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Filler, quantity	1
Jacket Color	Black
Jacket Marking	Feet
Jacket Marking Method	Laser
Jacket Marking Text	COMMScope OPTICAL CABLE OS2 SM 48F (SERIAL NUMBER) MM/YYYY XXXXXXXXFT
Location of Manufacturing	Claremont, North Carolina
Subunit, quantity	4
Fibers per Subunit, quantity	12
Total Fiber Count	48

Dimensions

Buffer Tube/Subunit Diameter	1.45 mm 0.057 in
Diameter Over Jacket	5.1 mm 0.201 in
Tone Wire Gauge	24 AWG

Representative Image

810010471/DB/GS | B-048-LN-HY-F12NS/15G /8W048/1X24AWG/GS

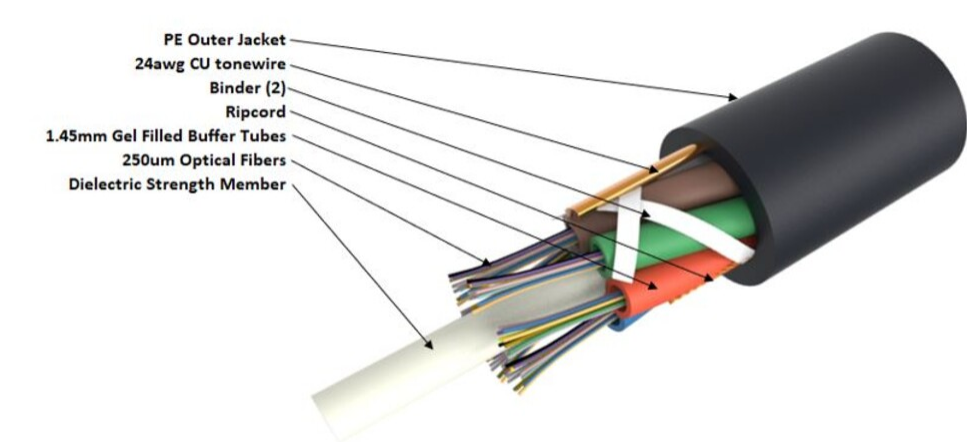

Material Specifications

Jacket Material	High density polyethylene (HDPE)
-----------------	----------------------------------

Mechanical Specifications

Minimum Bend Radius, loaded	208.3 mm 8.201 in
Minimum Bend Radius, unloaded	55 mm 2.165 in
Tensile Load, long term, maximum	97 N 21.806 lbf
Tensile Load, short term, maximum	324 N 72.838 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	IEC 60794-1-21 E3
Flex	25 cycles
Flex Test Method	IEC 60794-1 E6
Impact	0.3 N-m 2.655 in lb
Impact Test Method	IEC 60794-1-21 E4
Strain	See long and short term tensile loads
Strain Test Method	IEC 60794-1-21 E1
Twist	10 cycles
Twist Test Method	IEC 60794-1-21 E7
Vertical Rise, maximum	492 m 1,614.173 ft

Optical Specifications

Fiber Type	G.652.D G.652.D and G.657.A1
------------	--------------------------------

810010471/DB/GS | B-048-LN-HY-F12NS/15G/8W048/1X24AWG/GS

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Storage Temperature	-30 °C to +75 °C (-22 °F to +167 °F)
Cable Qualification Standards	IEC 60794-5-10
Environmental Space	Air-blown, microduct
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F4

Environmental Test Specifications

Cable Freeze	-2 °C 28.4 °F
Cable Freeze Test Method	IEC 60794-1 F15
Drip	70 °C 158 °F
Drip Test Method	IEC 60794-1-21 E14
Heat Age	-30 °C to +85 °C (-22 °F to +185 °F)
Heat Age Test Method	IEC 60794-1-22 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	IEC 60794-1-21 E11
Temperature Cycle	-30 °C to +70 °C (-22 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1-22 F1

Packaging and Weights

Cable weight	22 kg/km 14.783 lb/kft
--------------	--------------------------

Included Products

CS-8W-250-B-LN - TeraSPEED® G652D/G657A1 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable