

PFC-304016



Powered Fiber Cable, OM3, 4 Fibers, Outdoor, 16AWG Conductor, meter, feet

- Easy peel, stranded conductors for maximum cable flexibility and rapid access
- Polarization indentation along one side of the cable for polarity identification
- No special tools or mounting hardware required - usage of a standard "FTTH" pressure clamp for aerial installation
- Easy split of cable into three separate sections for separate routing in closures, as needed for installation
- Polyethylene jacket for outdoor duct or direct buried applications

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Product Type | Hybrid cable, fiber and power |
| Ordering Note | Minimum order quantity is 500 meter |

General Specifications


| | |
|--------------------------------|------------------|
| Cable Type | Stranded outdoor |
| Fiber Short Description | PFC-016 |
| Jacket Color | Black |
| Total Fiber Count | 4 |

Dimensions

| | |
|---------------------------|--------------------|
| Height Over Jacket | 4.318 mm 0.17 in |
| Width Over Jacket | 11.43 mm 0.45 in |
| Conductor Gauge | 16 AWG |

Outline Drawing

PFC-304016

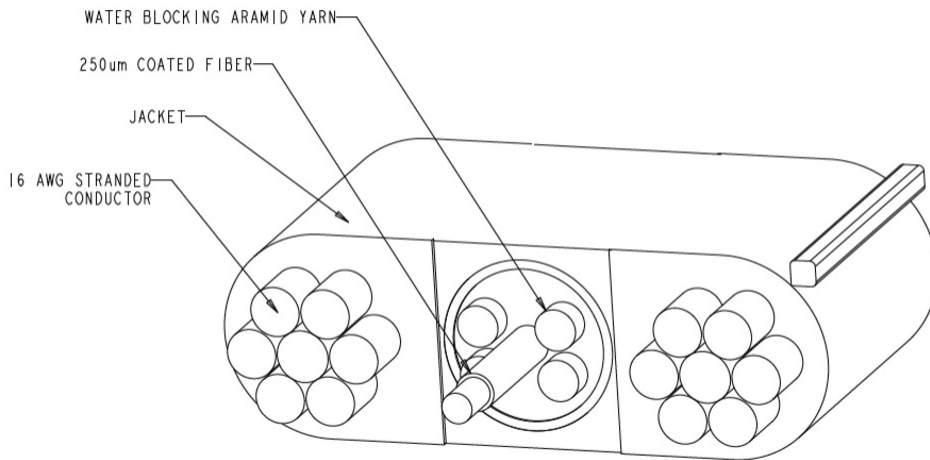

Mechanical Specifications

| | |
|--|----------------------|
| Minimum Bend Radius, loaded | 50.8 mm 2 in |
| Minimum Bend Radius, unloaded | 30.48 mm 1.2 in |
| Tensile Load, long term, maximum | 133.447 N 30 lbf |
| Tensile Load, short term, maximum | 440.374 N 99 lbf |
| Vertical Rise, maximum | 122.011 m 400.3 ft |

Optical Specifications

| | |
|-------------------|-----------------------|
| Fiber Type | OM3, bend insensitive |
|-------------------|-----------------------|

Environmental Specifications

| | |
|--------------------------------------|--------------------------------------|
| Installation temperature | -10 °C to +60 °C (+14 °F to +140 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Cable Qualification Standards | Telcordia GR-20-CORE Issue 4 |
| Environmental Space | Outdoor |
| Jacket UV Resistance | UV stabilized |

Packaging and Weights

| | |
|---------------------|--------------------------|
| Cable weight | 69.944 kg/km 47 lb/kft |
|---------------------|--------------------------|

PFC-304016

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



Included Products

CS-5E-PFC – 50µm OM3 Bend-Insensitive Multimode Fiber

CS-5E-PFC

50µm OM3 Bend-Insensitive Multimode Fiber

Product Classification

| | |
|---------------------|---------------|
| Portfolio | CommScope® |
| Product Type | Optical fiber |

General Specifications

| | |
|--|--|
| Cladding Diameter | 125 µm |
| Cladding Diameter Tolerance | ±0.8 µm |
| Cladding Non-Circularity, maximum | 0.7 % |
| Coating Diameter (Colored) | 242 µm |
| Coating Diameter Tolerance (Colored) | ±7 µm |
| Coating/Cladding Concentricity Error, maximum | 10 µm |
| Core Diameter | 50 µm |
| Core Diameter Tolerance | ±2.5 µm |
| Core/Clad Offset, maximum | 1 µm |
| Proof Test | 689.476 N/mm ² 100000 psi |

Mechanical Specifications

| | |
|---|---------------------------------------|
| Macrobending, 15 mm Ø mandrel, 2 turns | 0.20 dB @ 850 nm 0.50 dB @ 1,300 nm |
| Macrobending, 30 mm Ø mandrel, 2 turns | 0.10 dB @ 850 nm 0.30 dB @ 1,300 nm |
| Coating Strip Force, maximum | 8.9 N 2.001 lbf |
| Coating Strip Force, minimum | 1.3 N 0.292 lbf |
| Dynamic Fatigue Parameter, minimum | 25 |

Optical Specifications

| | |
|--|---------------------|
| Numerical Aperture | 0.2 |
| Numerical Aperture Tolerance | ±0.015 |
| Point Defects, maximum | 0.2 dB |
| Zero Dispersion Slope, maximum | 0.105 ps/[km-nm-nm] |
| Zero Dispersion Wavelength, maximum | 1340 nm |
| Zero Dispersion Wavelength, minimum | 1295 nm |

CS-5E-PFC

Optical Specifications, Wavelength Specific

| | |
|-------------------------------------|---|
| Attenuation, maximum | 1.20 dB/km @ 1,300 nm 3.00 dB/km @ 850 nm |
| Backscatter Coefficient | -68.0 dB @ 850 nm -75.7 dB @ 1,300 nm |
| Bandwidth, Laser, minimum | 2,000 MHz-km @ 850 nm 500 MHz-km @ 1,300 nm |
| Bandwidth, OFL, minimum | 1,500 MHz-km @ 850 nm 500 MHz-km @ 1,300 nm |
| Differential Mode Delay Note | Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm |
| Index of Refraction | 1.477 @ 1,300 nm 1.482 @ 850 nm |
| Standards Compliance | ANSI/TIA-492AAAF (OM3) |

Environmental Specifications

| | |
|--|--------------------|
| Heat Aging, maximum | 0.10 dB/km @ 85 °C |
| Temperature Dependence, maximum | 0.1 dB/km |
| Temperature Humidity Cycling, maximum | 0.1 dB/km |
| Water Immersion, maximum | 0.10 dB/km @ 23 °C |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

* Footnotes

| | |
|--|---|
| Temperature Dependence, maximum | Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F) |
| Temperature Humidity Cycling, maximum | Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity |