


C400-NFNR

Base Product



Product Classification

| | |
|----------------|------------------------|
| Product Type | Braided cable assembly |
| Product Brand | CNT® |
| Product Series | CNT-400 |

General Specifications

| | |
|------------------------------------|--|
| Attachment, Connector A | Field attachment |
| Attachment, Connector B | Field attachment |
| Body Style, Connector A | Straight |
| Body Style, Connector B | Right angle |
| Cable Family | CNT-400 |
| Interface, Connector A | N Female |
| Interface, Connector B | N Male |
| Specification Sheet Revision Level | A |
| Variable Length | For custom lengths, contact your local ANDREW representative |

Dimensions

| | |
|--------------|------------|
| Length | 0 m 0 ft |
| Nominal Size | 0.400 in |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 700–3000 MHz | 1.433 | 14.99 |

Jumper Assembly Sample Label

C400-NFNR



Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

Included Products

| | |
|--------------|---|
| 400BPNR-C | - Type N Male Right Angle for CNT-400 braided cable |
| 400BPNR-C-CR | - Type N Male Right Angle for CNT-400 braided cable |
| 400BPNR-C-G | - Type N Male Right Angle for CNT-400 braided cable |
| 400PNF-C | - Type N Female for CNT-400 braided cable |
| 400PNR-C | - Type N Male Right Angle for CNT-400 braided cable |
| CNT-400 | - CNT-400, CNT® 50 Ohm Braided Coaxial Cable, variable, black PE jacket |
| CNT-400-SFR | - CNT-400-SFR, C CNT® 50 Ohm Braided Coaxial Cable, black non-halogenated, fire retardant polyolefin jacket, B2ca S1a d0 a1 Compliant |
| CNT-400-W | - CNT-400-W, CNT® 50 Ohm Braided Coaxial Cable, variable, white PE jacket |

400BPNR-C



Type N Male Right Angle for CNT-400 braided cable

Product Classification

| | |
|---------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® ConQuest® |

General Specifications


| | |
|---------------------------------|-------------|
| Body Style | Right angle |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Silver |
| Interface | N Male |
| Outer Contact Attachment Method | Clamp |
| Outer Contact Plating | Trimetal |

Dimensions

| | |
|--------------|---------------------|
| Height | 35.69 mm 1.405 in |
| Width | 22.33 mm 0.879 in |
| Length | 49.28 mm 1.94 in |
| Nominal Size | 0.405 in |

Outline Drawing

400BPNR-C

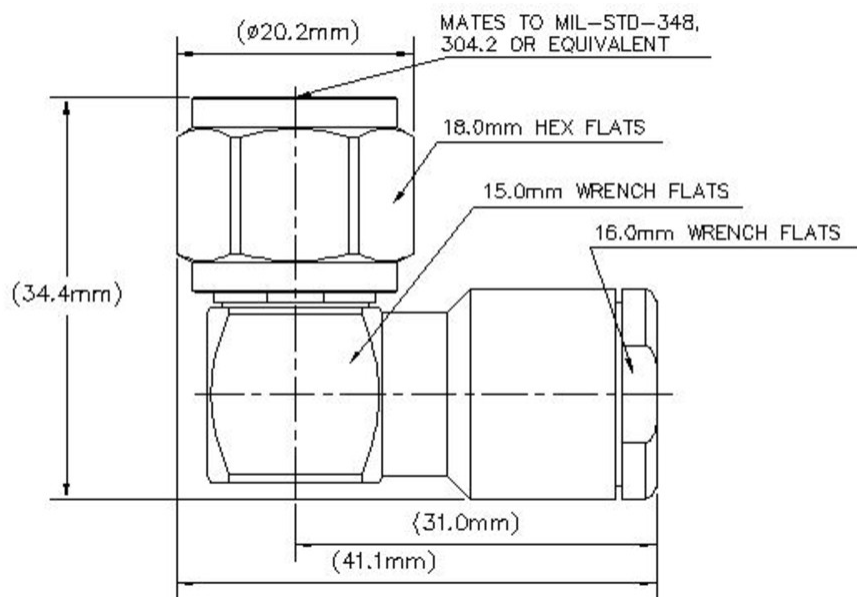

Electrical Specifications

| | |
|--------------------------------------|--------------|
| Insertion Loss, typical | 0.05 dB |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 0–3000 MHz | 1.064 | 30.18 |
| 3000–6000 MHz | 1.171 | 22.08 |

Mechanical Specifications

| | |
|-----------------------------------|------------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
| Connector Retention Torque | 0.56 N-m 4.956 in lb |

400BPNR-C

| | |
|-------------------------------------|------------------------|
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Proof Torque Method | IEC 61169-16:9.3.6 |
| Coupling Nut Retention Force | 450 N 101.164 lbf |
| Coupling Nut Retention Force Method | IEC 61169-16:9.3.11 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

Packaging and Weights

| | |
|-------------|------------------|
| Weight, net | 135 g 0.298 lb |
|-------------|------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

400BPNR-C



* Footnotes

| | |
|--------------------------------|---|
| Insertion Loss, typical | 0.05√freq (GHz) (not applicable for elliptical waveguide) |
| Immersion Depth | Immersion at specified depth for 24 hours |

400BPNR-C-CR



Type N Male Right Angle for CNT-400 braided cable

Product Classification

| | |
|---------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® ConQuest® |

General Specifications


| | |
|---------------------------------|-------------|
| Body Style | Right angle |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Silver |
| Interface | N Male |
| Outer Contact Attachment Method | Crimp |
| Outer Contact Plating | Trimetal |

Dimensions

| | |
|--------------|---------------------|
| Height | 41.63 mm 1.639 in |
| Width | 20.25 mm 0.797 in |
| Length | 33.19 mm 1.307 in |
| Nominal Size | 0.405 in |

400BPNR-C-CR

Outline Drawing

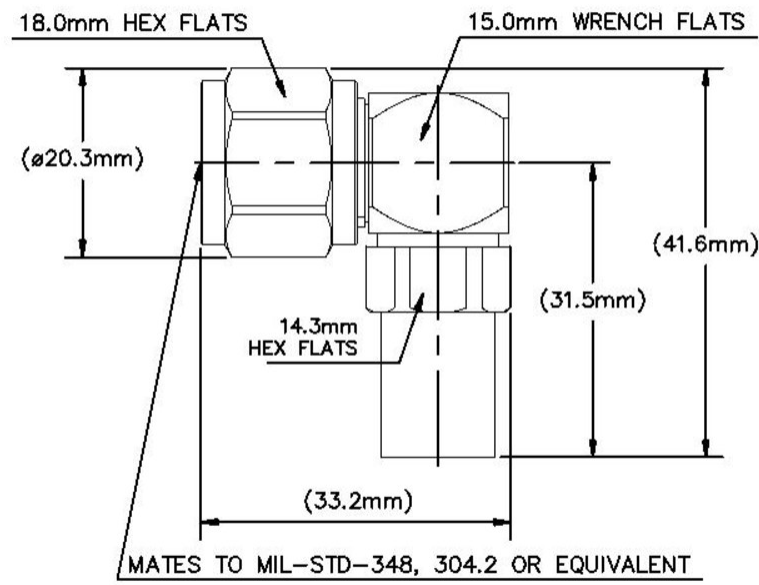

Electrical Specifications

| | |
|--------------------------------------|--------------|
| Insertion Loss, typical | 0.05 dB |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 0–3000 MHz | 1.064 | 30.18 |

400BPNR-C-CR

| | | |
|---------------|-------|-------|
| 3000–6000 MHz | 1.171 | 22.08 |
|---------------|-------|-------|

Mechanical Specifications

| | |
|-------------------------------------|------------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
| Connector Retention Torque | 0.56 N-m 4.956 in lb |
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Proof Torque Method | IEC 61169-16:9.3.6 |
| Coupling Nut Retention Force | 450 N 101.164 lbf |
| Coupling Nut Retention Force Method | IEC 61169-16:9.3.11 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

Packaging and Weights

| | |
|-------------|--------------------|
| Weight, net | 53.42 g 0.118 lb |
|-------------|--------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |

400BPNR-C-CR

UK-ROHS

Compliant



* Footnotes

Insertion Loss, typical 0.05√freq (GHz) (not applicable for elliptical waveguide)

400BPNR-C-G

Type N Male Right Angle for CNT-400 braided cable

Product Classification

| | |
|---------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® ConQuest® |

General Specifications

| | |
|---------------------------------|-------------|
| Body Style | Right angle |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Gold |
| Interface | N Male |
| Outer Contact Attachment Method | Clamp |
| Outer Contact Plating | Trimetal |

Dimensions

| | |
|--------------|---------------------|
| Height | 35.69 mm 1.405 in |
| Width | 22.33 mm 0.879 in |
| Length | 49.28 mm 1.94 in |
| Nominal Size | 0.405 in |

Electrical Specifications

| | |
|--------------------------------------|--------------|
| Insertion Loss, typical | 0.05 dB |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

400BPNR-C-G

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 0–3000 MHz | 1.064 | 30.18 |
| 3000–6000 MHz | 1.171 | 22.08 |

Mechanical Specifications

| | |
|-------------------------------------|------------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
| Connector Retention Torque | 0.56 N-m 4.956 in lb |
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Proof Torque Method | IEC 61169-16:9.3.6 |
| Coupling Nut Retention Force | 450 N 101.164 lbf |
| Coupling Nut Retention Force Method | IEC 61169-16:9.3.11 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

Packaging and Weights

| | |
|-------------|------------------|
| Weight, net | 135 g 0.298 lb |
|-------------|------------------|

Regulatory Compliance/Certifications

400BPNR-C-G

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

* Footnotes

| | |
|-------------------------|---|
| Insertion Loss, typical | 0.05√freq (GHz) (not applicable for elliptical waveguide) |
| Immersion Depth | Immersion at specified depth for 24 hours |

400PNF-C



Type N Female for CNT-400 braided cable

Product Classification

| | |
|---------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® ConQuest® |

General Specifications


| | |
|---------------------------------|------------|
| Body Style | Straight |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Gold |
| Interface | N Female |
| Outer Contact Attachment Method | Clamp |
| Outer Contact Plating | Trimetal |
| Pressurizable | No |

Dimensions

| | |
|--------------|---------------------|
| Width | 19 mm 0.748 in |
| Length | 40.84 mm 1.608 in |
| Diameter | 19 mm 0.748 in |
| Nominal Size | 0.405 in |

Outline Drawing

400PNF-C

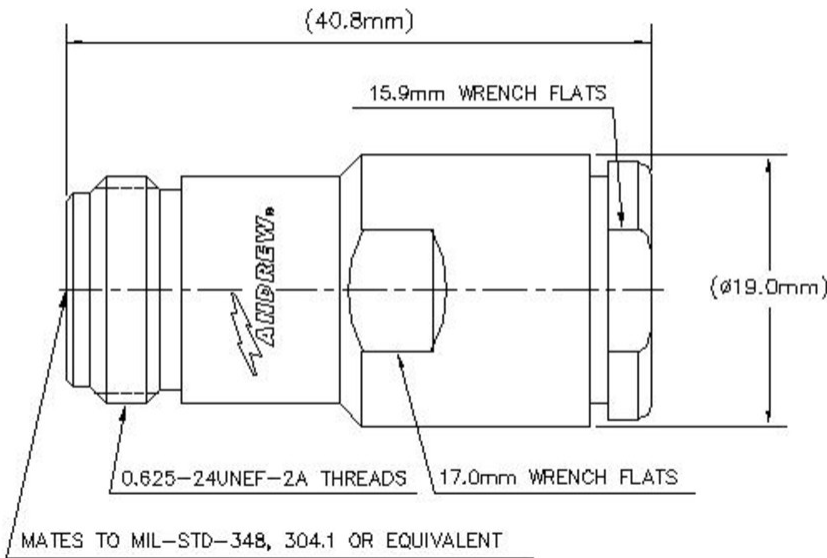

Electrical Specifications

| | |
|--------------------------------------|-------------------|
| Insertion Loss, typical | 0.05 dB |
| Average Power at Frequency | 580.0 W @ 900 MHz |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 0–3000 MHz | 1.045 | 33.15 |
| 3000–6000 MHz | 1.172 | 22.03 |

Mechanical Specifications

| | |
|-----------------------------------|--------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
|-----------------------------------|--------------------|

400PNF-C

| | |
|------------------------------|---|
| Connector Retention Torque | 0.56 N-m 4.956 in lb 0.75 N-m 6.638 in lb |
| Insertion Force | 28 N 6.295 lbf |
| Insertion Force Method | IEC 61169-16:9.3.5 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

Packaging and Weights

| | |
|-------------|--------------------|
| Weight, net | 53.19 g 0.117 lb |
|-------------|--------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

* Footnotes

| | |
|-------------------------|---|
| Insertion Loss, typical | 0.05√freq (GHz) (not applicable for elliptical waveguide) |
| Immersion Depth | Immersion at specified depth for 24 hours |

400PNR-C



Type N Male Right Angle for CNT-400 braided cable

Product Classification

| | |
|---------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® |

General Specifications


| | |
|---------------------------------|-------------|
| Body Style | Right angle |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Silver |
| Interface | N Male |
| Outer Contact Attachment Method | Clamp |
| Outer Contact Plating | Silver |

Dimensions

| | |
|--------------|---------------------|
| Height | 35.69 mm 1.405 in |
| Width | 22.33 mm 0.879 in |
| Length | 49.28 mm 1.94 in |
| Nominal Size | 0.405 in |

Outline Drawing

400PNR-C

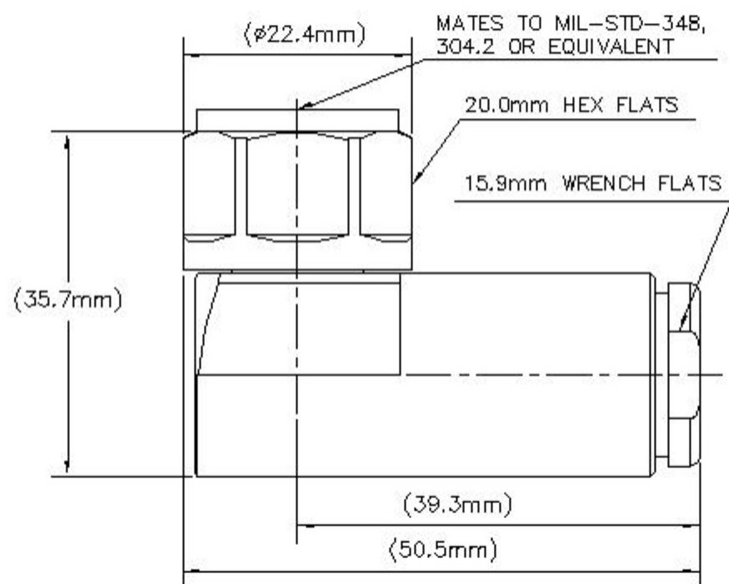

Electrical Specifications

| | |
|--------------------------------------|-------------------|
| Insertion Loss, typical | 0.05 dB |
| Average Power at Frequency | 580.0 W @ 900 MHz |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 0–3000 MHz | 1.064 | 30.18 |
| 3000–6000 MHz | 1.171 | 22.08 |

Mechanical Specifications

| | |
|-----------------------------------|--------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
|-----------------------------------|--------------------|

400PNR-C

| | |
|-------------------------------------|---|
| Connector Retention Torque | 0.56 N-m 4.956 in lb 0.75 N-m 6.638 in lb |
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Proof Torque Method | IEC 61169-16:9.3.6 |
| Coupling Nut Retention Force | 450 N 101.164 lbf |
| Coupling Nut Retention Force Method | IEC 61169-16:9.3.11 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

Packaging and Weights

| | |
|-------------|------------------|
| Weight, net | 135 g 0.298 lb |
|-------------|------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |

400PNR-C

UK-ROHS

Compliant



* Footnotes

| | |
|--------------------------------|---|
| Insertion Loss, typical | 0.05√freq (GHz) (not applicable for elliptical waveguide) |
| Immersion Depth | Immersion at specified depth for 24 hours |

CNT-400



CNT-400, CNT® 50 Ohm Braided Coaxial Cable, variable, black PE jacket

Product Classification

| | |
|----------------|-----------------------|
| Product Type | Braided coaxial cable |
| Product Brand | CNT® |
| Product Series | CNT-400 |

General Specifications

| | |
|----------------|---------|
| Braid Coverage | 90 % |
| Cable Type | CNT-400 |
| Jacket Color | Black |

Dimensions

| | |
|--------------------------|---------------------|
| Diameter Over Dielectric | 7.24 mm 0.285 in |
| Diameter Over Jacket | 10.29 mm 0.405 in |
| Diameter Over Tape | 7.391 mm 0.291 in |
| Inner Conductor OD | 2.74 mm 0.108 in |
| Outer Conductor OD | 8.08 mm 0.318 in |
| Nominal Size | 0.400 in |

Electrical Specifications

| | |
|---------------------------------|------------------------------|
| Cable Impedance | 50 ohm |
| Capacitance | 78 pF/m 23.774 pF/ft |
| dc Resistance, Inner Conductor | 4.69 ohms/km 1.43 ohms/kft |
| dc Resistance, Outer Conductor | 5.61 ohms/km 1.71 ohms/kft |
| dc Test Voltage | 2500 V |
| Jacket Spark Test Voltage (rms) | 4000 V |
| Maximum Frequency | 16.2 GHz |
| Operating Frequency Band | 30 – 6000 MHz |
| Peak Power | 16 kW |

CNT-400

| | |
|--------------------------|---------------------------|
| Shielding Effectiveness | 90 dB |
| Velocity | 85 % |
| Material Specifications | |
| Braid Material | Tinned copper |
| Dielectric Material | Foam PE |
| Jacket Material | Non-halogenated PE |
| Inner Conductor Material | Copper-clad aluminum wire |
| Shield Tape Material | Aluminum |

Mechanical Specifications

| | |
|----------------------------------|--------------------------|
| Minimum Bend Radius, single Bend | 25.4 mm 1 in |
| Tensile Strength | 73 kg 160.937 lb |
| Bending Moment | 0.7 N-m 6.196 in lb |
| Flat Plate Crush Strength | 0.7 kg/mm 39.198 lb/in |

Environmental Specifications

| | |
|--------------------------|--------------------------------------|
| Installation temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -70 °C to +85 °C (-94 °F to +185 °F) |

Packaging and Weights

| | |
|--------------|------------------------|
| Cable weight | 0.1 kg/m 0.067 lb/ft |
|--------------|------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |



CNT-400-SFR



CNT-400-SFR, C CNT® 50 Ohm Braided Coaxial Cable, black non-halogenated, fire retardant polyolefin jacket, B2ca S1a d0 a1 Compliant

Product Classification

| | |
|----------------|-----------------------|
| Product Type | Braided coaxial cable |
| Product Brand | CNT® |
| Product Series | CNT-400 |

General Specifications

| | |
|----------------|---------|
| Braid Coverage | 90 % |
| Cable Type | CNT-400 |
| Jacket Color | Black |

Dimensions

| | |
|--------------------------|---------------------|
| Diameter Over Dielectric | 7.24 mm 0.285 in |
| Diameter Over Jacket | 10.29 mm 0.405 in |
| Diameter Over Tape | 7.391 mm 0.291 in |
| Inner Conductor OD | 2.74 mm 0.108 in |
| Outer Conductor OD | 8.08 mm 0.318 in |
| Nominal Size | 0.400 in |

Electrical Specifications

| | |
|---------------------------------|-------------------------------|
| Cable Impedance | 50 ohm |
| Capacitance | 78 pF/m 23.774 pF/ft |
| dc Resistance, Inner Conductor | 4.49 ohms/km 1.369 ohms/kft |
| dc Resistance, Outer Conductor | 5.61 ohms/km 1.71 ohms/kft |
| dc Test Voltage | 2500 V |
| Jacket Spark Test Voltage (rms) | 4000 V |
| Maximum Frequency | 16.2 GHz |
| Operating Frequency Band | 30 – 6000 MHz |
| Peak Power | 16 kW |

CNT-400-SFR

| | |
|-------------------------|-------|
| Shielding Effectiveness | 90 dB |
| Velocity | 85 % |

Material Specifications

| | |
|--------------------------|--|
| Braid Material | Tinned copper |
| Dielectric Material | Foam PE |
| Jacket Material | Non-halogenated, fire retardant polyolefin |
| Inner Conductor Material | Copper-clad aluminum wire |
| Shield Tape Material | Aluminum |

Mechanical Specifications

| | |
|----------------------------------|--------------------------|
| Minimum Bend Radius, single Bend | 25.4 mm 1 in |
| Tensile Strength | 73 kg 160.937 lb |
| Bending Moment | 0.7 N-m 6.196 in lb |
| Flat Plate Crush Strength | 0.7 kg/mm 39.198 lb/in |

Environmental Specifications

| | |
|--|--------------------------------------|
| Installation temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Operating Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Storage Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| EN50575 CPR Cable EuroClass Fire Performance | B2ca |
| EN50575 CPR Cable EuroClass Smoke Rating | s1a |
| EN50575 CPR Cable EuroClass Droplets Rating | d0 |
| EN50575 CPR Cable EuroClass Acidity Rating | a1 |
| Smoke Index Test Method | IEC 61034 |
| Toxicity Index Test Method | IEC 60754-2 |

Packaging and Weights

| | |
|--------------|------------------------|
| Cable weight | 0.1 kg/m 0.067 lb/ft |
|--------------|------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CENELEC | EN 50575 compliant, Declaration of Performance (DoP) available |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

CNT-400-SFR



CNT-400-W

CNT-400-W, CNT® 50 Ohm Braided Coaxial Cable, variable, white PE jacket



Product Classification

| | |
|----------------|-----------------------|
| Product Type | Braided coaxial cable |
| Product Brand | CNT® |
| Product Series | CNT-400 |

General Specifications

| | |
|----------------|---------|
| Braid Coverage | 90 % |
| Cable Type | CNT-400 |
| Jacket Color | White |

Dimensions

| | |
|--------------------------|---------------------|
| Diameter Over Dielectric | 7.24 mm 0.285 in |
| Diameter Over Jacket | 10.29 mm 0.405 in |
| Diameter Over Tape | 7.391 mm 0.291 in |
| Inner Conductor OD | 2.74 mm 0.108 in |
| Outer Conductor OD | 8.08 mm 0.318 in |
| Nominal Size | 0.400 in |

Electrical Specifications

| | |
|---------------------------------|------------------------------|
| Cable Impedance | 50 ohm |
| Capacitance | 78 pF/m 23.774 pF/ft |
| dc Resistance, Inner Conductor | 4.69 ohms/km 1.43 ohms/kft |
| dc Resistance, Outer Conductor | 5.61 ohms/km 1.71 ohms/kft |
| dc Test Voltage | 2500 V |
| Jacket Spark Test Voltage (rms) | 4000 V |

CNT-400-W

| | |
|--------------------------|---------------|
| Maximum Frequency | 16.2 GHz |
| Operating Frequency Band | 30 – 6000 MHz |
| Peak Power | 16 kW |
| Shielding Effectiveness | 90 dB |
| Velocity | 85 % |

Material Specifications

| | |
|--------------------------|---------------------------|
| Braid Material | Tinned copper |
| Dielectric Material | Foam PE |
| Jacket Material | Non-halogenated PE |
| Inner Conductor Material | Copper-clad aluminum wire |
| Shield Tape Material | Aluminum |

Mechanical Specifications

| | |
|----------------------------------|--------------------------|
| Minimum Bend Radius, single Bend | 25.4 mm 1 in |
| Tensile Strength | 73 kg 160.937 lb |
| Bending Moment | 0.7 N-m 6.196 in lb |
| Flat Plate Crush Strength | 0.7 kg/mm 39.198 lb/in |

Environmental Specifications

| | |
|--------------------------|--------------------------------------|
| Installation temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -70 °C to +85 °C (-94 °F to +185 °F) |

Packaging and Weights

| | |
|--------------|------------------------|
| Cable weight | 0.1 kg/m 0.067 lb/ft |
|--------------|------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |