


# FSWLUCUCWH

---

## Base Product

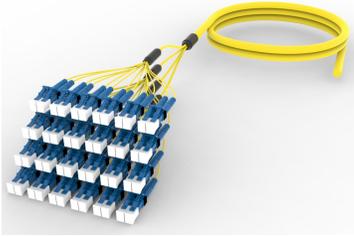

TeraSPEED® LC/UPC to Unconnectorized, Distribution Cable, 48-Fiber, Plenum

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | North America   |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber distribution cable assembly                                 |
| <b>Product Brand</b>         | SYSTIMAX InstaPATCH® 360  |
| <b>Ordering Note</b>         | For lengths greater than 999 ft (304 m), orders must be in meters |

## General Specifications


|                                       |                      |
|---------------------------------------|----------------------|
| <b>Cable Glands</b>                   | No glands            |
| <b>Color, connector A</b>             | Blue                 |
| <b>Construction Type</b>              | Distribution, indoor |
| <b>Interface Feature, connector A</b> | Keyed                |
| <b>Interface, Connector B</b>         | Unterminated         |
| <b>Total Fibers, quantity</b>         | 48                   |

## Dimensions

|   |          |
|---|----------|
| <b>Cable Assembly Length Range (m)</b>  | 3 – 999  |
| <b>Cable Assembly Length Range (ft)</b> | 10 – 999 |

## Ordering Tree

# FSWLCUCWH

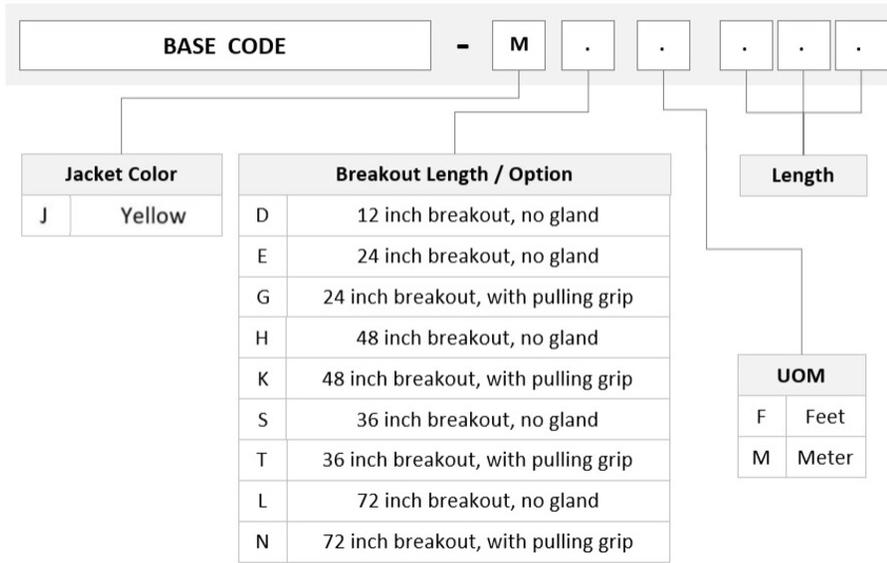

## Mechanical Specifications

**Cable Retention Strength, maximum** 0.50 lb @ 0° | 0.50 lb @ 90°

## Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.652.D | G.657.A1, TeraSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Indoor | Plenum

## Included Products

- 760004382 - Fiber indoor cable, TeraSPEED® Plenum Distribution, 48 fiber multi-unit with 12 fiber subunits, P-048-DS-8W-FMUYL Singlemode G.652.D and G.657.A1, Gel-free, Feet jacket marking, Yellow jacket color
- 860655488 - LC/UPC Connector, Singlemode, Blue