


# UAXLCUCOC

Base Product



Ultra Low Loss (ULL) LazrSPEED® 550 LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Tight Buffer, 12-fiber Kit, Blue - Aqua (1-12)

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber pigtail, unjacketed
Product Brand	SYSTIMAX ULL
Product Series	UAX
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration


## General Specifications

Color, connector A	Beige
Interface, Connector A	LC/UPC
Total Fibers, quantity	12

## Dimensions

Cable Assembly Length Range (m)	1 – 20
Cable Assembly Length Range (ft)	1 – 66

## Ordering Tree

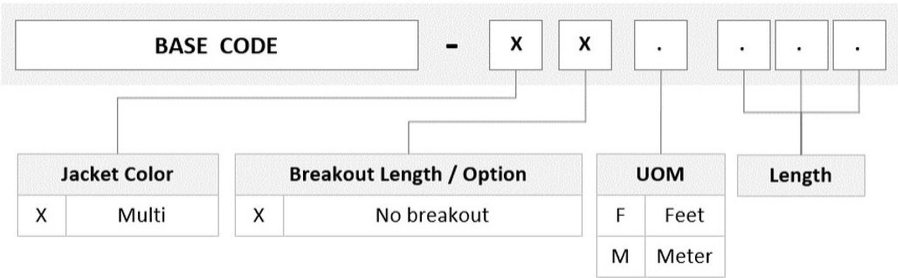

# UAXLCUCOC

---

## Mechanical Specifications

**Cable Retention Strength, maximum** 1.00 lb @ 0 ° | 1.00 lb @ 90 °

## Optical Specifications

<b>Fiber Mode</b>	Multimode
<b>Fiber Type</b>	OM4, LazrSPEED®
<b>Insertion Loss, maximum, connector A</b>	0.15 dB
<b>Return Loss, minimum, connector A</b>	35 dB

## Environmental Specifications

<b>Operating Temperature</b>	-10 °C to +60 °C (+14 °F to +140 °F)
<b>Environmental Space</b>	Unrated

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system