

# UFVLULUK2

Base Product



## Ultra Low Loss OM5, LC/UPC Uniboot to LC/UPC Uniboot, 1.5 mm Duplex Fiber Patch Cord, Low Smoke Zero Halogen/Riser

- Patch cords using Uniboot technology combine, modularity, flexibility with easy insertion and removal from connectivity
- Uniboot connectors feature an adjustable polarity via a manual and independent rotation of each single connector body without exposing the fibers
- Uniboot technology features a push-pull mechanism operated by squeezing the connector boot

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber patch cord, duplex
Product Brand	SYSTIMAX ULL
Product Series	UFV
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, connector A	Beige
Color, connector B	Beige
Interface, Connector A	LC/UPC
Interface Feature, connector A	Uniboot
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Lime green
Total Fibers, quantity	2

## Dimensions

Cable Assembly Length Range (m)	1 – 999
Cable Assembly Length Range (ft)	1 – 999
Diameter Over Jacket	1.5 mm   0.059 in

# UFVLULUK2

## Ordering Tree

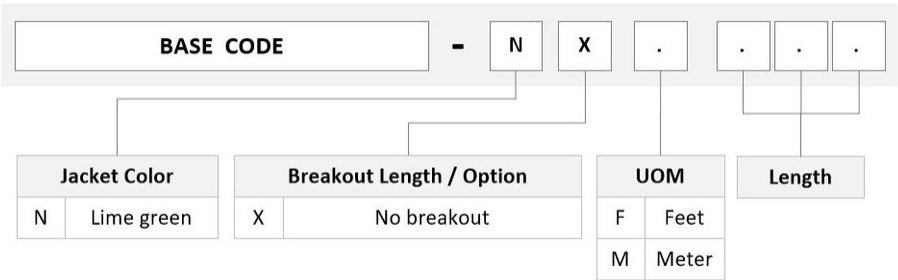

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM5, LazrSPEED®  
**Insertion Loss, maximum** 0.15 dB  
**Return Loss, minimum** 35 dB

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Dual Rated LSZH/Riser

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

760251281 – Fiber Indoor Cable, LazrSPEED® Low Smoke Zero Halogen Light Duty Interconnect, 2 fiber,  
N-002-DU-5G-M15LM/AY/LTS Multimode OM5, Gel-free, Meters jacket marking, Lime green jacket color

