


# UGGMPUCRP

Base Product

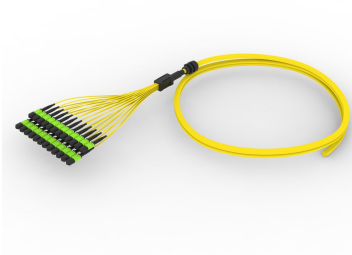

Ultra Low Loss (ULL) Singlemode, MPO12 Unpinned to Unconnectorized, Fiber Trunk Cable Assembly, 288-Fiber, Rollable Ribbon Central Tube, Plenum

## Product Classification

Regional Availability	Latin America   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Black
Color, connector A	Green
Construction Type	Rollable ribbon
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Female
Interface, Connector B	Unterminated
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	288

## Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

# UGGMPUCRP

## Ordering Tree

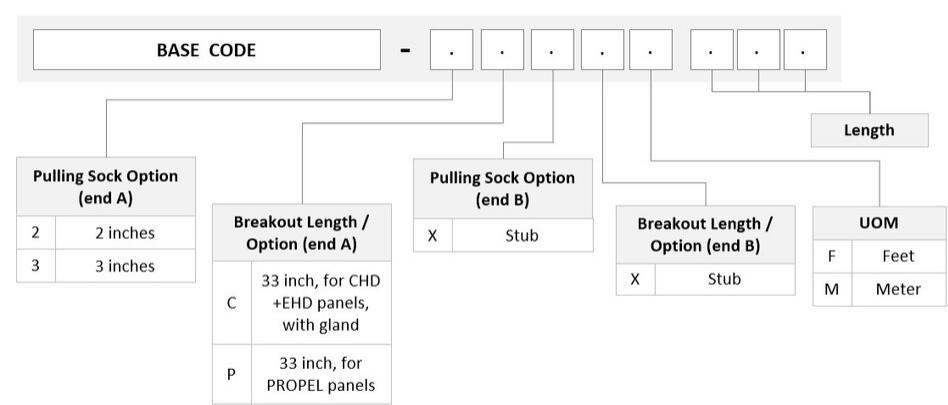

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Singlemode  
**Fiber Type** G.657.A2, TeraSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Plenum

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ANATEL	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## Included Products

760239140 P-288-CN-RR-F12YL/8G/99E	–	Fiber indoor cable, Plenum All-Dielectric Central Tube Rollable Ribbon, 288 fiber, Singlemode G. 657.A2, Feet jacket marking, Yellow jacket color
---------------------------------------	---	---

# UGGMPUCRP

---

860638318 – MP012, ULTRA LOW LOSS, FEMALE, Singlemode, GREEN, 3mm