UGXMPMXAL

Base Product



Ultra Low Loss (ULL) OM4 MPO (Unpinned) to MPO (Pinned), Preterminated Trunk Cable, MPO12, 96-Fiber, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot ABlackColor, connector AAquaColor, boot BBlackColor, connector BAquaConstruction TypeStranded

Furcation Color Aqua

 Interface, Connector A
 MPO-12/UPC Female

 Interface, Connector B
 MPO-12/UPC Male

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 96

Dimensions

Breakout Length 33 in

Cable Assembly Length Range (m) 3 - 999


Cable Assembly Length Range (ft) 10 - 999

Page 1 of 3



UGXMPMXAL

Ordering Tree

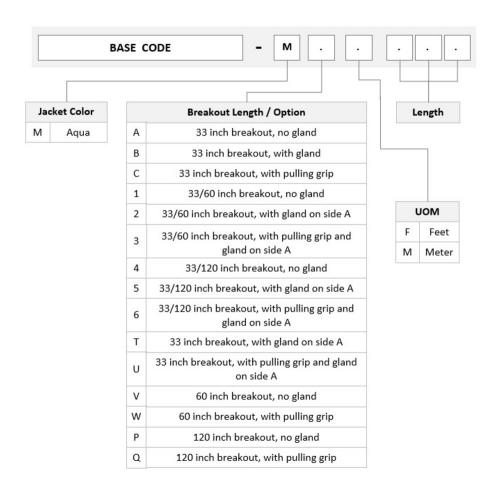

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

COMMSCOPE®

UGXMPMXAL

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Compliant

Classification **Agency**

Designed, manufactured and/or distributed under this quality management system ISO 9001:2015



ANATEL

Included Products

Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, 96 fiber multi-unit with 12 fiber subunits, 760051664 P-096-MP-5K-F12AQ

Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color

MPO12, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm 860366210

MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm 860366228

