# **UJGMPUCAF**

#### **Base Product**



Ultra Low Loss (ULL) Singlemode MPO12 (Unpinned) to Unconnectorized, Fiber Trunk Cable Assembly, 24-Fiber, Low Smoke Zero Halogen/Riser

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Color, boot ABlackColor, connector AGreenConstruction TypeStrandedFurcation ColorYellow

Interface, Connector A MPO-12/APC Female

Interface, Connector B Unterminated

Jacket Color Yellow

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 24

**Dimensions** 

Breakout Length 33 in

Cable Assembly Length Range (m) 3 – 999


**COMMSCOPE®** 

# UJGMPUCAF

#### Cable Assembly Length Range (ft)

10 - 999

## Ordering Tree

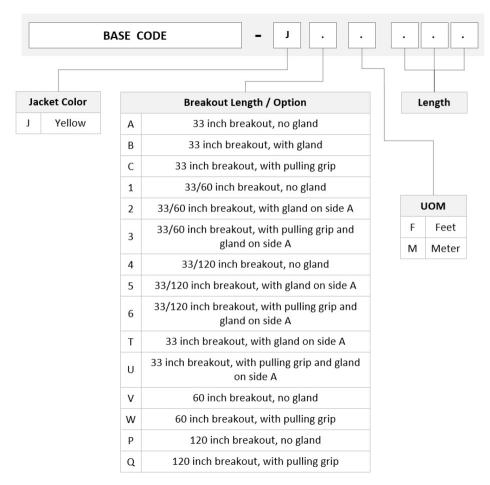

### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0  $^{\circ}$  | 4.40 lb @ 90  $^{\circ}$ 

Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

## **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C to } +60 \,^{\circ}\text{C (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$ 

Environmental Space Dual Rated LSZH/Riser | Indoor

**COMMSCOPE®** 

# UJGMPUCAF

### Regulatory Compliance/Certifications

Agency Classification
ANATEL Compliant

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



#### Included Products

760237973 N-024-MP-8G1-F12YL/D

860638318 – MPO12, ULTRA LOW LOSS, FEMALE, Singlemode, GREEN, 3mm

Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 24 fiber with 12 fiber subunits, Singlemode G.657.A2/B2, Gel-free, Feet jacket marking, Yellow jacket color, Dca Flame rating

