## UJGMXUCDL

#### **Base Product**



Ultra Low Loss Singlemode MPO12 Pinned to Unconnectorized 96-Fiber Pre-terminated Trunk Cable, Indoor/Outdoor, Low Smoke Zero Halogen /Riser

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

**Product Type** Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Color, boot ABlackColor, connector AGreenConstruction TypeStrandedFurcation ColorYellow

Interface, Connector A MPO-12/APC Male

Interface, Connector B Unterminated

Jacket Color Black

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 96

#### Dimensions

Breakout Length 33 in


Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 - 999



## UJGMXUCDL

### Ordering Tree

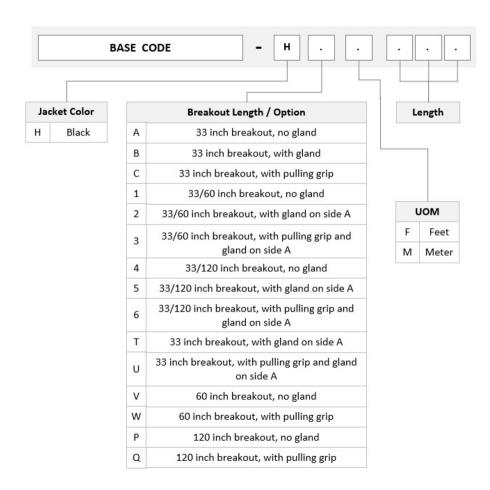

### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

## **Environmental Specifications**

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser | Indoor/Outdoor

**COMMSCOPE®** 

# UJGMXUCDL

### Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



#### Included Products

760238830 – Fiber Indoor/Outdoor cable, Low Smoke Zero Halogen Riser MPO Trunk, Gel-Free, 96 fiber multi-Z-096-MP-8G-F12BK/D unit with 12 fiber subunits, Singlemode G.657.A2/B2, Feet jacket marking, Black jacket color,

Dca flame rating

860638317 – MPO12, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 3mm



