


UJV2X2XBF

Base Product

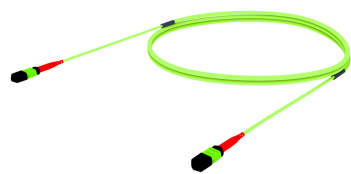

Ultra Low Loss (ULL) OM5 MPO24 (Pinned) to MPO24 (Pinned), Fiber Trunk Cable Assembly, 24-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

| | |
|-----------------------|------------------------------------------------------------------------------------------------------------|
| Regional Availability | Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America |
| Portfolio | CommScope® |
| Product Type | Fiber trunk cable assembly |
| Product Brand | SYSTIMAX ULL |
| Ordering Note | Not available in the United States or Canada |

General Specifications


| | |
|------------------------------|-------------------------|
| Color, boot A | Red |
| Color, connector A | Lime green |
| Color, boot B | Red |
| Color, connector B | Lime green |
| Construction Type | Stranded |
| Furcation Color | Lime green |
| Interface, Connector A | MPO-24/UPC Male |
| Interface, Connector B | MPO-24/UPC Male |
| Jacket Color | Lime green |
| Polarity | Method B Enhanced (ULL) |
| Fibers per Subunit, quantity | 24 |
| Total Fibers, quantity | 24 |

Dimensions

| | |
|----------------------------------|----------|
| Breakout Length | 33 in |
| Cable Assembly Length Range (m) | 3 – 999 |
| Cable Assembly Length Range (ft) | 10 – 999 |

UJV2X2XBF

Ordering Tree

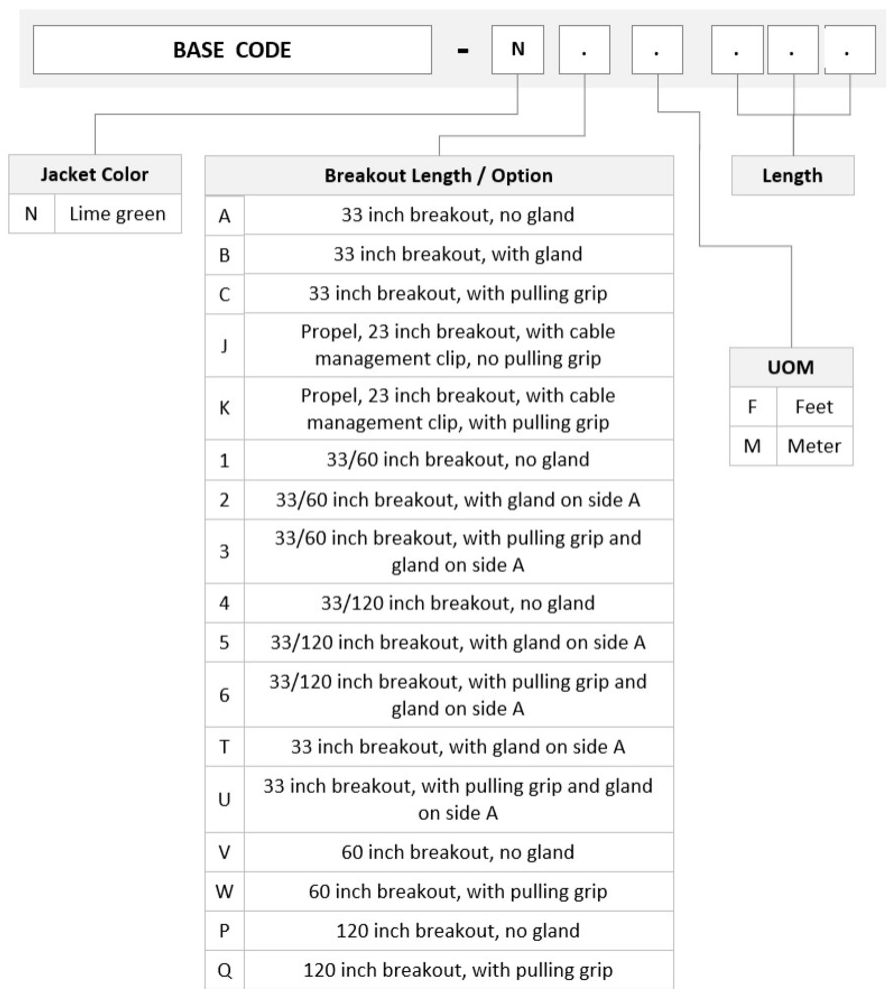

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode
Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space Dual Rated LSZH/Riser | Indoor

UJV2X2XBF

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--------------------------------------------------------------------------------------------------------------------------------|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

| | | |
|---------------------|---|---------------------------------------------------------------------------------------------------------------|
| 760256688 | - | Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser Light Duty for MPO |
| N-024-MP-5G-F30LM/D | - | Patchcords, 24 fiber, Multimode OM5, Gel-free, Feet jacket marking, Lime green jacket color, Dca Flame rating |
| 860662280 | - | MPO24,MALE,OM5,LIME,3.0MM |