UJVMPMXAD

Base Product



Ultra Low Loss (ULL) OM5 MPO12 (Unpinned) to MPO12 (Pinned), Fiber Trunk Cable Assembly, 12-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot A Black

Color, connector A Lime green

Color, boot B Black

Color, connector BLime greenConstruction TypeStrandedFurcation ColorLime green

Interface, Connector A MPO-12/UPC Female

Interface, Connector B MPO-12/UPC Male

Jacket Color Lime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 12

Dimensions

Breakout Length 33 in

Cable Assembly Length Range (m) 3 - 999


Cable Assembly Length Range (ft) 10 - 999

Page 1 of 3



UJVMPMXAD

Ordering Tree

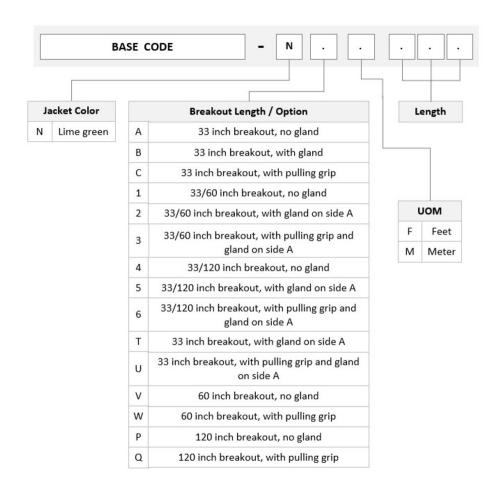

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+60 \,^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F}$)

COMMSCOPE®

UJVMPMXAD

Environmental Space

Dual Rated LSZH/Riser | Indoor

Regulatory Compliance/Certifications

Classification **Agency**

Compliant CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system **REACH-SVHC** Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted **UK-ROHS** Compliant/Exempted



ANATEL



Included Products

Fiber Indoor Cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 12 fiber, 760229047 Gel-free, Multimode OM5, Dca Flame Rating, Feet jacket marking, Lime green jacket color N-012-MP-5G-F12LM/D

MPO12, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm 860617232 MPO12, ULTRA LOW LOSS, MALE, OM5, LIME, 3mm 860617240