
UJX2P2XBL

Base Product



Ultra Low Loss (ULL) OM4 MPO24 (Unpinned) to MPO24 (Pinned), Fiber Trunk Cable Assembly, 96-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot ARedColor, connector AAquaColor, boot BRedColor, connector BAquaConstruction TypeStranded

onorability pe

Furcation Color Aqua

 Interface, Connector A
 MPO-24/UPC Female

 Interface, Connector B
 MPO-24/UPC Male

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 24

Total Fibers, quantity 96

Dimensions

Breakout Length 33 in

Cable Assembly Length Range (m) 3 - 999


Cable Assembly Length Range (ft) 10 - 999

Page 1 of 3



UJX2P2XBL

Ordering Tree

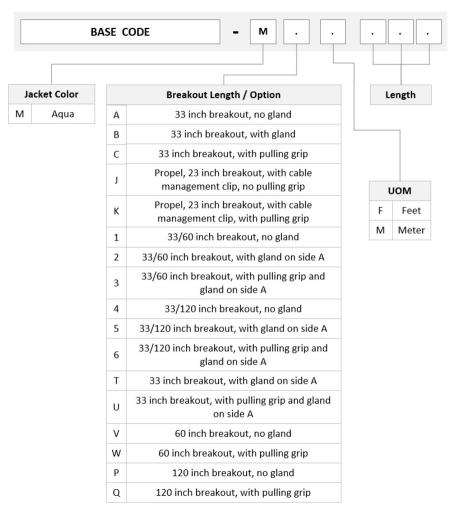

Mechanical Specifications

Cable Retention Strength, maximum $11.24 \text{ lb} @ 0 \degree | 4.40 \text{ lb} @ 90 \degree$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

COMMSCOPE®

UJX2P2XBL

Environmental Space

Dual Rated LSZH/Riser | Indoor

Regulatory Compliance/Certifications

Classification **Agency**

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system **REACH-SVHC** Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted **UK-ROHS** Compliant/Exempted



Included Products

Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 96 fiber with 24-760249077 N-096-MP-5K-F24AQ/30T/B2

fiber, 3.0 mm subunits, Multimode OM4, Feet jacket marking, Aqua jacket color, B2ca flame

rating

MPO24,FEMALE,OM3/4,AQUA,3.0MM 860662277 MPO24,MALE,OM3/4,AQUA,3.0MM 860662278



