


## Base Product

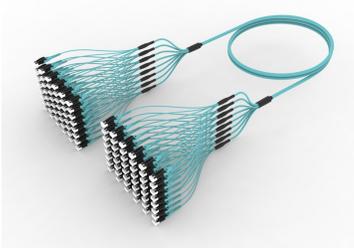

Ultra Low Loss ULL LazrSPEED® 550 LC/UPC Uniboot to LC/UPC Uniboot Ruggedized fanout Cable, 96-Fiber, Plenum, 12 fiber PmP 2.0mm

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Ruggedized fanout
<b>Product Brand</b>	SYSTIMAX ULL
<b>Ordering Note</b>	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications

<b>Color, boot A</b>	Blue
<b>Color, connector A</b>	Black
<b>Color, boot B</b>	Blue
<b>Color, connector B</b>	Black
<b>Construction Type</b>	Stranded
<b>Furcation Color</b>	Aqua
<b>Interface, Connector A</b>	LC/UPC
<b>Interface Feature, connector A</b>	Uniboot
<b>Interface, Connector B</b>	LC/UPC
<b>Interface Feature, connector B</b>	Uniboot
<b>Jacket Color</b>	Aqua
<b>Fibers per Subunit, quantity</b>	12
<b>Total Fibers, quantity</b>	96

## Dimensions


<b>Cable Assembly Length Range (m)</b>	3 – 999
--	---------

# ULXLULUCL

Cable Assembly Length Range (ft)

8 – 999

## Ordering Tree

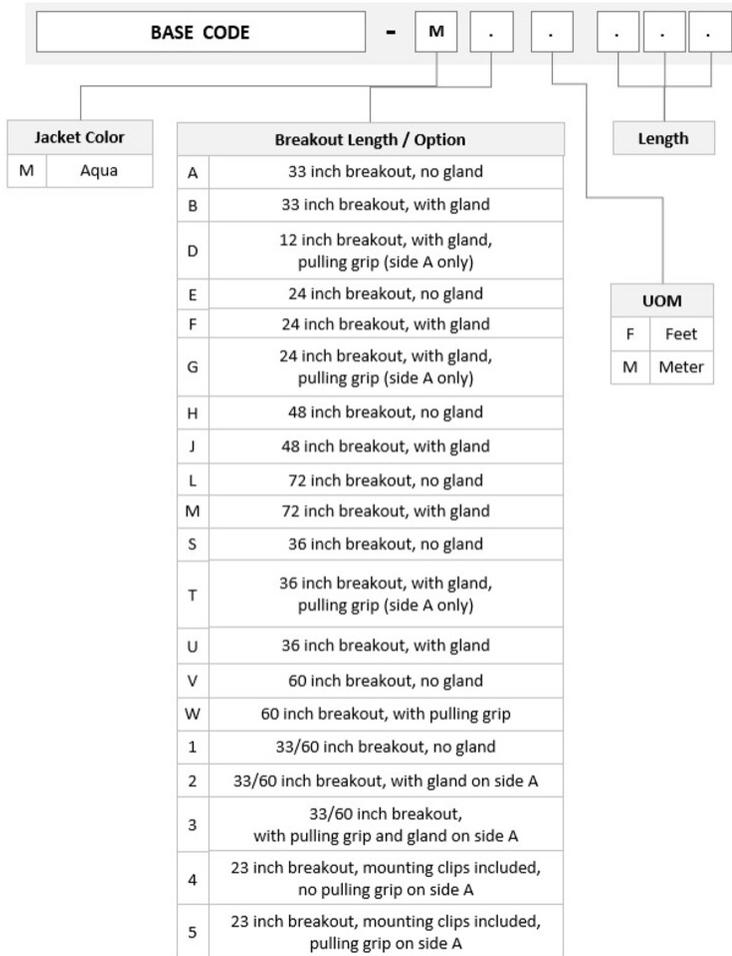

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Indoor | Plenum

## Regulatory Compliance/Certifications

# ULXLULUCL

---

## Agency

CHINA-ROHS

ISO 9001:2015

REACH-SVHC

ROHS

UK-ROHS

## Classification

Below maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant as per SVHC revision on [www.commscope.com/ProductCompliance](http://www.commscope.com/ProductCompliance)

Compliant

Compliant



## Included Products

760242122

P-096-MP-5K-F12AQ/20T

860658161

- Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, 96 fiber multi-unit with 12 fiber subunits, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color
- 2.0 mm LC/UPC Uniboot GEN 1.5, Aqua