


AGXMXMPAL

Base Product

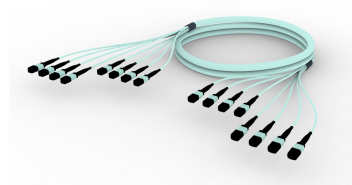

OM4 MPO-12 (Pinned) to MPO-12 (Unpinned), Pre-terminated Trunk Cable, 96-Fiber, Plenum, Method A

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration


General Specifications

Color, boot A	Black
Color, connector A	Aqua
Color, boot B	Black
Color, connector B	Aqua
Construction Type	Stranded
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC Male
Interface, Connector B	MPO-12/UPC Female
Jacket Color	Aqua
Polarity	Method A
Fibers per Subunit, quantity	12
Total Fibers, quantity	96

Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

Ordering Tree

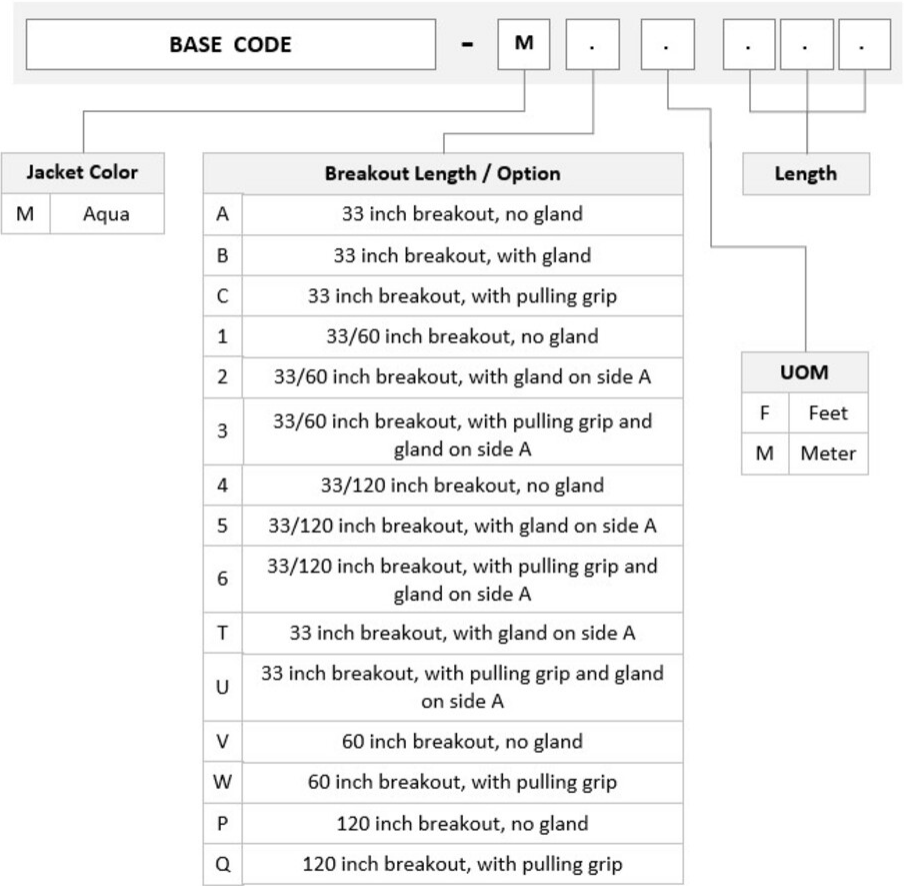

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode
Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

AGXMXMPAL

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

760051664	–	Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, 96 fiber multi-unit with 12 fiber subunits,
P-096-MP-5K-F12AQ		Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color
860366210	–	MPO12, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm
860366228	–	MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm