FDXLCSC21

Base Product



OM4 LC/UPC to SC/UPC Fiber Patch Cord, 1.6 mm Simplex, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber patch cord, simplex

Product Brand SYSTIMAX InstaPATCH® 360

Product Series FDX

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

Color, boot A Aqua

Color, connector A Black

Color, boot B Aqua

Color, connector B Black

Interface, Connector A LC/UPC

Interface, Connector B SC/UPC

Jacket Color Aqua

Polarity Method B

Total Fibers, quantity

Dimensions

Cable Assembly Length Range (m) 1 - 999


Cable Assembly Length Range (ft) 1 - 999

Diameter Over Jacket 1.6 mm | 0.063 in

Ordering Tree



FDXLCSC21

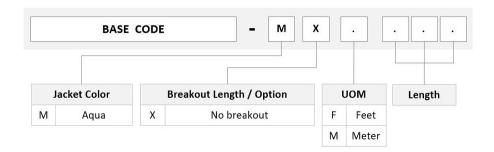

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C} \text{ to } +60 \,^{\circ}\text{C} \text{ (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$

Environmental Space Plenum

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

460125172 - Pre-Radiused LC Connector simplex for 1.6 mm Fiber, multimode

460125735 – LazrSPEED® Pre-Radiused SC Connector for 1.6 mm Fiber Cordage, Simplex, multimode
P-001-SP-5K-F16 – Fiber indoor cable, LazrSPEED® 1.6 mm Plenum Simplex, Multimode OM4, Feet jacket marking

Page 2 of 2