## UQX2PQPHF

#### **Base Product**



Ultra Low Loss OM4, MPO24 (Unpinned) to MPO8 QSFP (Unpinned), Fiber Extension Cable Assembly, 24-Fiber, Plenum

#### **Product Classification**

Regional Availability Australia/New Zealand | Europe | Latin America | Middle East/Africa | North

America

Portfolio CommScope®

**Product Type** Fiber array cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Color, boot A Red

Color, connector A Aqua

Color, boot B Gray

Color, connector B Aqua

Construction Type Stranded

Furcation Color Aqua

Interface, Connector A MPO-24/UPC Female

Interface, Connector B MPO-08/UPC Female

Interface Feature, connector B QSFP configuration

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 24

Dimensions


COMMSC PE®

### UQX2PQPHF

Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 - 999

#### Ordering Tree

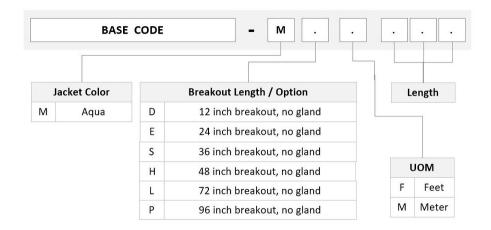

#### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

**Optical Specifications** 

**Fiber Mode** Multimode

**Fiber Type** OM4, LazrSPEED®

#### **Environmental Specifications**

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

### Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

#### Included Products

760245199 – Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 24 fiber, Multimode P-024-MP-5K-F30AQ OM4, Feet jacket marking, Aqua jacket color

own, rect jacket manning, rique jacket solor

860633307 – MP08, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm

COMMSC PE°

# UQX2PQPHF

860662277

MPO24,FEMALE,OM3/4,AQUA,3.0MM

