

Fiber outdoor drop cable, LightScope® ZWP Self-Supporting All-Dielectric, Singlemode G.652.D and G.657.A1, 2 fiber Arid Core construction, Gel-filled, central loose tube, Feet jacket marking, Black jacket color

- \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

## Product Classification


Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	O-DF
Government Requirements	Build America Buy America (BABA) compliant*

## General Specifications

Cable Type	Central loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Feet
Location of Manufacturing	Catawba, North Carolina
Subunit, quantity	1
Fibers per Subunit, quantity	2
Total Fiber Count	2

## Dimensions

Height Over Jacket	4.5 mm   0.177 in
Buffer Tube/Subunit Diameter	3 mm   0.118 in
Diameter Over Jacket	7.9 mm   0.311 in

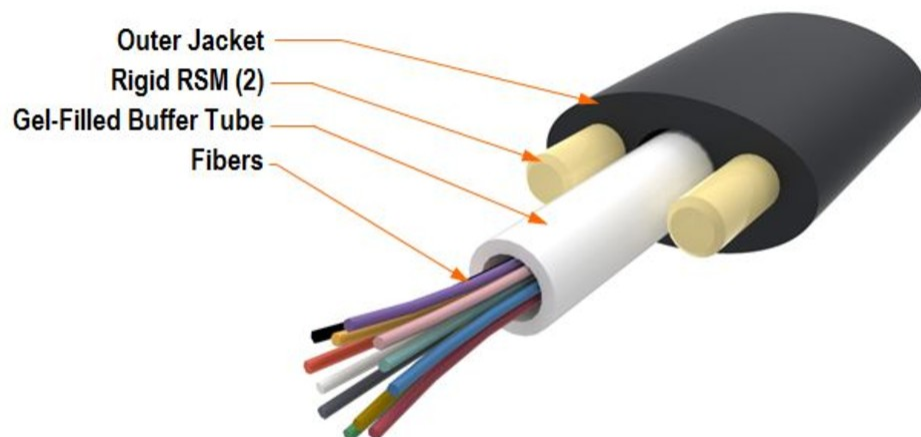

## Material Specifications

<b>Jacket Material</b>	PE
<b>Mechanical Specifications</b>	
<b>Minimum Bend Radius, loaded</b>	86 mm   3.386 in
<b>Minimum Bend Radius, unloaded</b>	81 mm   3.189 in
<b>Tensile Load, long term, maximum</b>	400 N   89.924 lbf
<b>Tensile Load, short term, maximum</b>	1334 N   299.895 lbf
<b>Compression</b>	10 N/mm   57.101 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	35 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	1047 m   3,435.039 ft

## Optical Specifications

Fiber Type

G.652.D and G.657.A1 | G.652.D and G.657.A1

## Environmental Specifications

Installation temperature

-30 °C to +70 °C (-22 °F to +158 °F)

Operating Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Storage Temperature

-40 °C to +75 °C (-40 °F to +167 °F)

Cable Qualification Standards

ANSI/ICEA S-110-717 | Telcordia GR-20

Environmental Space

Aerial, self-support | Buried

Jacket UV Resistance

UV stabilized

Water Penetration

24 h

Water Penetration Test Method

FOTP-82 | IEC 60794-1 F5

## Environmental Test Specifications

Cable Freeze

-2 °C | 28.4 °F

Cable Freeze Test Method

FOTP-98 | IEC 60794-1 F15

Drip

70 °C | 158 °F

Drip Test Method

FOTP-81 | IEC 60794-1 E14

Heat Age

-40 °C to +85 °C (-40 °F to +185 °F)

Heat Age Test Method

IEC 60794-1 F9

Low High Bend

-30 °C to +60 °C (-22 °F to +140 °F)

Low High Bend Test Method

FOTP-37 | IEC 60794-1 E11

Temperature Cycle

-40 °C to +70 °C (-40 °F to +158 °F)

Temperature Cycle Test Method

FOTP-3 | IEC 60794-1 F1

## Packaging and Weights

Cable weight

39 kg/km | 26.207 lb/kft

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant

UK-ROHS

Compliant



## Included Products

DB-8W-LT – LightScope® ZWP Singlemode  
Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable



### Product Classification

<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Optical fiber

### General Specifications

<b>Cladding Diameter</b>	125 µm
<b>Cladding Diameter Tolerance</b>	±0.7 µm
<b>Cladding Non-Circularity, maximum</b>	0.7 %
<b>Coating Diameter (Colored)</b>	249 µm
<b>Coating Diameter (Uncolored)</b>	242 µm
<b>Coating Diameter Tolerance (Colored)</b>	±13 µm
<b>Coating Diameter Tolerance (Uncolored)</b>	±5 µm
<b>Coating/Cladding Concentricity Error, maximum</b>	12 µm
<b>Core Diameter</b>	8.3 µm
<b>Core/Clad Offset, maximum</b>	0.5 µm
<b>Proof Tensile Stress</b>	100,000 psi (0.69 GPa)

### Dimensions

<b>Fiber Curl, minimum</b>	4 m   13.123 ft
----------------------------	-----------------

### Mechanical Specifications

<b>Macrobending, 20 mm Ø mandrel, 1 turn</b>	0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm
<b>Macrobending, 30 mm Ø mandrel, 10 turns</b>	0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm
<b>Macrobending, 60 mm Ø mandrel, 100 turns</b>	0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm
<b>Coating Strip Force, maximum</b>	8.9 N   2.001 lbf
<b>Coating Strip Force, minimum</b>	1.3 N   0.292 lbf
<b>Dynamic Fatigue Parameter, minimum</b>	20

# DB-8W-LT

## Optical Specifications

Cabled Cutoff Wavelength, maximum	1260 nm
Point Defects, maximum	0.1 dB
Zero Dispersion Slope, maximum	0.092 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1324 nm
Zero Dispersion Wavelength, minimum	1300 nm

## Optical Specifications, Wavelength Specific

Attenuation, maximum	0.22 dB/km @ 1,550 nm   0.25 dB/km @ 1,490 nm   0.25 dB/km @ 1,625 nm   0.36 dB/km @ 1,310 nm   0.36 dB/km @ 1,385 nm
Attenuation, typical	0.19 dB/km @ 1,550 nm   0.33 dB/km @ 1,310 nm
Backscatter Coefficient	-79.6 dB @ 1,310 nm   -82.1 dB @ 1,550 nm
Dispersion, maximum	18 ps(nm-km) at 1550 nm   3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm
Index of Refraction	1.467 @ 1,310 nm   1.467 @ 1,385 nm   1.468 @ 1,550 nm
Mode Field Diameter	10.4 μm @ 1,550 nm   9.2 μm @ 1,310 nm   9.6 μm @ 1,385 nm
Mode Field Diameter Tolerance	±0.4 μm @ 1310 nm   ±0.5 μm @ 1550 nm   ±0.6 μm @ 1385 nm
Polarization Mode Dispersion Link Design Value, maximum	0.04 ps/sqrt(km)
Standards Compliance	ITU-T G.652.D   ITU-T G.657.A1

## Environmental Specifications

Heat Aging, maximum	0.05 dB/km @ 85 °C
Temperature Dependence, maximum	0.05 dB/km
Temperature Humidity Cycling, maximum	0.05 dB/km
Water Immersion, maximum	0.05 dB/km @ 23 °C

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

# DB-8W-LT

---

<b>Temperature Dependence, maximum</b>	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
<b>Temperature Humidity Cycling, maximum</b>	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity