

400BPNM-C-CR



Type N Male for CNT-400 braided cable

Product Classification

| | |
|----------------|-------------------------|
| Product Type | Braided cable connector |
| Product Brand | CNT® |
| Product Series | CNT-400 |

General Specifications


| | |
|---------------------------------|------------|
| Body Style | Straight |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Silver |
| Interface | N Male |
| Outer Contact Attachment Method | Crimp |
| Outer Contact Plating | Trimetal |

Dimensions

| | |
|--------------|---------------------|
| Width | 20.25 mm 0.797 in |
| Length | 39.05 mm 1.537 in |
| Diameter | 20.25 mm 0.797 in |
| Nominal Size | 0.405 in |

400BPNM-C-CR

Outline Drawing

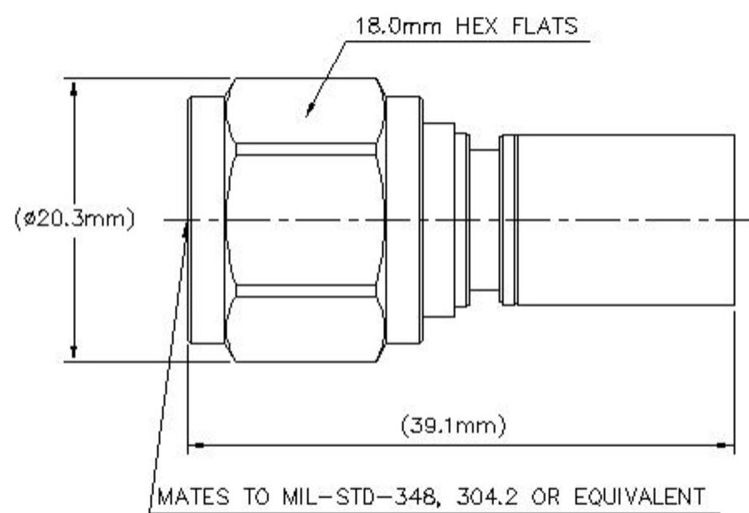

Electrical Specifications

| | |
|--------------------------------------|--------------|
| Insertion Loss, typical | 0.05 dB |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 2500 V |
| Inner Contact Resistance, maximum | 1 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 6000 MHz |
| Outer Contact Resistance, maximum | 0.25 mOhm |
| Peak Power, maximum | 10 kW |
| RF Operating Voltage, maximum (vrms) | 707 V |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|------|------------------|
| 0–3000 MHz | 1.02 | 40.09 |
| 3000–6000 MHz | 1.11 | 26 |

Mechanical Specifications

400BPNM-C-CR

| | |
|-------------------------------------|------------------------|
| Connector Retention Tensile Force | 330 N 74.187 lbf |
| Connector Retention Torque | 0.56 N-m 4.956 in lb |
| Coupling Nut Proof Torque | 8 N-m 70.806 in lb |
| Coupling Nut Proof Torque Method | IEC 61169-1:9.3.6 |
| Coupling Nut Retention Force | 450 N 101.164 lbf |
| Coupling Nut Retention Force Method | IEC 61169-1:9.3.11 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-16:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|--------------------------------------------|---------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Climatic Sequence Test Method | IEC 60068-1 |
| Corrosion Test Method | IEC 60068-2-11 |
| Damp Heat Steady State Test Method | IEC 60068-2-3 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |
| Water Jetting Test Mating | Mated |
| Water Jetting Test Method | IEC 60529:2001, IP65 |

Packaging and Weights

| | |
|-------------|--------------------|
| Weight, net | 28.88 g 0.064 lb |
|-------------|--------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--------------------------------------------------------------------------------------------------------------------------|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

400BPNM-C-CR

* Footnotes

Insertion Loss, typical $0.05\sqrt{\text{freq (GHz)}}$ (not applicable for elliptical waveguide)