


# UBVLCUC11

---

## Base Product

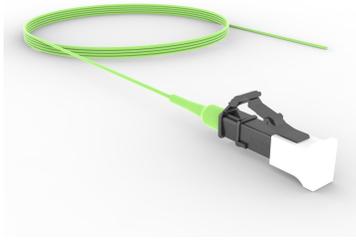

Ultra Low Loss (ULL) LazrSPEED® 550 WideBand LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Riser - SBJ

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber pigtail, unjacketed
<b>Product Brand</b>	SYSTIMAX ULL
<b>Product Series</b>	UBV
<b>Ordering Note</b>	Minimum length may vary based on cable configuration

## General Specifications


<b>Color, boot A</b>	Lime green
<b>Color, connector A</b>	Black
<b>Interface, Connector A</b>	LC/UPC
<b>Jacket Color</b>	Lime green
<b>Total Fibers, quantity</b>	1

## Dimensions

<b>Cable Assembly Length Range (m)</b>	1 – 61
<b>Cable Assembly Length Range (ft)</b>	2 – 200

## Ordering Tree

# UBVLCUC11

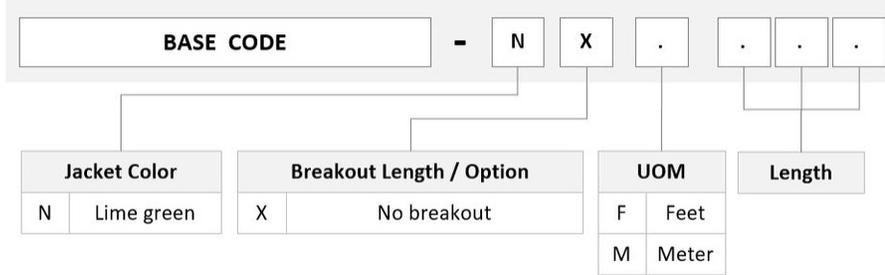

## Mechanical Specifications

**Cable Retention Strength, maximum** 2.00 lb @ 90 ° | 5.00 lb @ 0 °

## Optical Specifications

**Fiber Mode** Multimode

**Fiber Type** OM5, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Low Smoke Zero Halogen (LSZH)

## Packaging and Weights

**Packaging quantity** 2

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

860657288 – LC/PC Connector, Multimode, Lime

## LC/PC Connector, Multimode, Lime



### Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber connector

### General Specifications

<b>Color, boot</b>	Lime green
<b>Color, housing</b>	Black
<b>Interface</b>	LC/UPC

### Dimensions

<b>Length</b>	39.6 mm   1.559 in
<b>Compatible Cable Diameter</b>	0.9 mm   0.035 in

### Material Specifications

<b>Ferrule Material</b>	Zirconia
-------------------------	----------

### Mechanical Specifications

<b>Cable Retention Strength, maximum</b>	1.00 lb @ 0 °
--	---------------

### Optical Specifications

<b>Fiber Mode</b>	Multimode
<b>Insertion Loss Change, mating</b>	0.2 dB
<b>Optical Components Standard</b>	ANSI/TIA-568. 3-D   IEC 61753-1
<b>Insertion Loss Change, temperature</b>	0.2 dB
<b>Insertion Loss, ULL, maximum</b>	0.15 dB
<b>Insertion Loss, ULL, typical</b>	0.1 dB
<b>Return Loss, minimum</b>	35 dB

## \* Footnotes

**Insertion Loss Change, mating** TIA-568: Maximum insertion loss change after 500 matings

**Insertion Loss Change, temperature** Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)