


# F2A-HRHR-P

Base Product



FSJ2-50 SureFlex® Jumper with interface types 4.3-10 Male Right Angle and 4.3-10 Male Right Angle, variable length

## Product Classification

Product Type	Wireless transmission cable assembly
Product Series	FSJ2-50

## General Specifications

Body Style, Connector A	Right angle
Body Style, Connector B	Right angle
Interface, Connector A	4.3-10 Male
Interface, Connector B	4.3-10 Male
Orientation	0°
Specification Sheet Revision Level	A
Variable Length	For custom lengths, contact your local ANDREW representative

## Dimensions

Nominal Size	3/8 in
--------------	--------

## Electrical Specifications

3rd Order IMD	-110 dBm
3rd Order IMD Test Method	Two +43 dBm carriers

## VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.11	26.4
1700–2200 MHz	1.11	26.4
2200–2700 MHz	1.11	26.4

## Jumper Assembly Sample Label

# F2A-HRHR-P



## Environmental Specifications

**Immersion Test Method** Meets IEC 60529:2001, IP68 in mated condition

## Included Products

- F2HR-S2 – 4.3-10 Male Right Angle for 3/8 in foam and air coaxial cable, factory attached
- FSJ2-50 – FSJ2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket

# F2HR-S2

---

4.3-10 Male Right Angle for 3/8 in foam and air coaxial cable, factory attached

## Product Classification

Product Type	Wireless and radiating connector
Product Brand	HELIAX®   SureFlex®

## General Specifications


Body Style	Right angle
Inner Contact Attachment Method	Solder
Inner Contact Plating	Silver
Interface	4.3-10 Male
Outer Contact Attachment Method	Solder
Outer Contact Plating	Trimetal

## Dimensions

Height	34.29 mm   1.35 in
Width	32.26 mm   1.27 in
Length	23.88 mm   0.94 in
Nominal Size	3/8 in

## Outline Drawing

# F2HR-S2

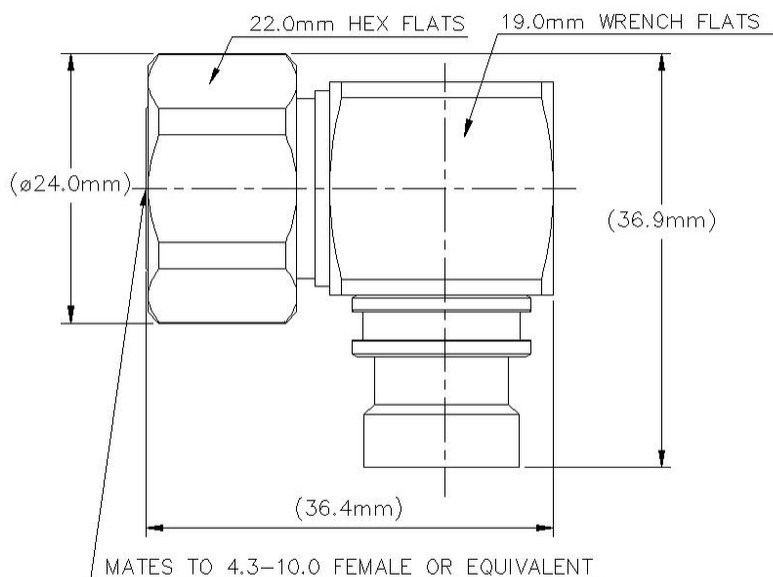

## Electrical Specifications

3rd Order IMD at Frequency	-119 dBm @ 910 MHz
3rd Order IMD Test Method	Two +43 dBm carriers
Insertion Loss Coefficient, typical	0.05
Average Power at Frequency	676.0 W @ 900 MHz
Cable Impedance	50 ohm
Connector Impedance	50 ohm
dc Test Voltage	2300 V
Inner Contact Resistance, maximum	1 mOhm
Insulation Resistance, minimum	5000 MOhm
Operating Frequency Band	0 – 6000 MHz
Outer Contact Resistance, maximum	1 mOhm
Peak Power, maximum	13.2 kW
RF Operating Voltage, maximum (vrms)	813 V
Shielding Effectiveness	-110 dB

## VSWR/Return Loss

# F2HR-S2

Frequency Band	VSWR	Return Loss (dB)
0–960 MHz	1.036	35.05
1710–2200 MHz	1.046	32.96
2200–2700 MHz	1.065	30.04
2700–3000 MHz	1.065	30.04
3000–6000 MHz	1.222	20.01

## Mechanical Specifications

Connector Retention Tensile Force	671.68 N   151 lbf
Connector Retention Torque	2.7 N-m   23.897 in lb
Coupling Nut Proof Torque	8 N-m   70.806 in lb
Coupling Nut Retention Force	449.98 N   101.16 lbf
Interface Durability	100 cycles
Interface Durability Method	IEC 61169-4:17
Mechanical Shock Test Method	IEC 60068-2-27

## Environmental Specifications

Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)
Storage Temperature	-65 °C to +125 °C (-85 °F to +257 °F)
Attenuation, Ambient Temperature	20 °C   68 °F
Average Power, Ambient Temperature	40 °C   104 °F
Average Power, Inner Conductor Temperature	100 °C   212 °F
Corrosion Test Method	IEC 60068-2-11
Immersion Depth	1 m
Immersion Test Mating	Mated
Immersion Test Method	IEC 60529:2001, IP68
Moisture Resistance Test Method	IEC 60068-2-3
Thermal Shock Test Method	IEC 60068-2-14
Vibration Test Method	IEC 60068-2-6

## Packaging and Weights

Weight, net	65.47 g   0.144 lb
-------------	--------------------

## Regulatory Compliance/Certifications

# F2HR-S2


Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## \* Footnotes

Insertion Loss Coefficient, typical	0.05√~freq (GHz) (not applicable for elliptical waveguide)
Immersion Depth	Immersion at specified depth for 24 hours

# FSJ2-50



FSJ2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket

## Product Classification

Product Type	Coaxial wireless cable
Product Brand	HELIAX®   SureFlex®
Product Series	FSJ2-50

## General Specifications

Product Number	887019902/00   SZ887019902/00
Flexibility	Superflexible
Jacket Color	Black
Performance Note	Attenuation values typical, guaranteed within 5%

## Dimensions

Diameter Over Dielectric	7.112 mm   0.28 in
Diameter Over Jacket	10.541 mm   0.415 in
Inner Conductor OD	2.794 mm   0.11 in
Outer Conductor OD	9.652 mm   0.38 in
Nominal Size	3/8 in

## Electrical Specifications

Cable Impedance	50 ohm ±1 ohm
Capacitance	79.7 pF/m   24.293 pF/ft
dc Resistance, Inner Conductor	4.232 ohms/km   1.29 ohms/kft
dc Resistance, Outer Conductor	4.987 ohms/km   1.52 ohms/kft
dc Test Voltage	2300 V
Inductance	0.2 µH/m   0.061 µH/ft
Insulation Resistance	100000 MOhms-km
Jacket Spark Test Voltage (rms)	4000 V
Operating Frequency Band	1 – 13400 MHz

# FSJ2-50

Peak Power	13.2 kW
Velocity	83 %

## VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
2.5–2.7 GHz	1.106	25.96
680–800 MHz	1.106	25.96
800–960 MHz	1.106	25.96
1700–2200 MHz	1.101	26.36

## Material Specifications

Dielectric Material	Foam PE
Jacket Material	PE
Inner Conductor Material	Copper-clad aluminum wire
Outer Conductor Material	Corrugated copper

## Mechanical Specifications

Minimum Bend Radius, multiple Bends	25.4 mm   1 in
Minimum Bend Radius, single Bend	25.4 mm   1 in
Number of Bends, minimum	20
Number of Bends, typical	50
Tensile Strength	95 kg   209.439 lb
Bending Moment	2.3 N-m   20.357 in lb
Flat Plate Crush Strength	1.8 kg/mm   100.795 lb/in

## Environmental Specifications

Installation temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Temperature	-55 °C to +85 °C (-67 °F to +185 °F)
Storage Temperature	-70 °C to +85 °C (-94 °F to +185 °F)
Attenuation, Ambient Temperature	68 °F   20 °C
Average Power, Ambient Temperature	104 °F   40 °C
Average Power, Inner Conductor Temperature	212 °F   100 °C

## Packaging and Weights



# FSJ2-50

**Cable weight** 0.12 kg/m | 0.081 lb/ft

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant

