

# VV-65B-R1



4-port sector antenna, 4x 1695–2690 MHz, 65° HPBW, 1x RET . The two high band arrays utilize a common tilt.

- The RET interface comprises one pair of AISG input/output ports
- Meets -153dBc 3rd order PIM, using 2x40W carriers

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Single band
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	PVC
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, mid band</b>	0
<b>RF Connector Quantity, low band</b>	0
<b>RF Connector Quantity, total</b>	4

## Remote Electrical Tilt (RET) Information


<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	1 female   1 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (1)
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Power Consumption, normal conditions, maximum</b>	10 W
<b>Protocol</b>	3GPP/AISG 2.0

## Dimensions

# VV-65B-R1

<b>Width</b>	305 mm   12.008 in
<b>Depth</b>	118 mm   4.646 in
<b>Length</b>	1787 mm   70.354 in
<b>Net Weight, antenna only</b>	12.7 kg   27.999 lb

## Array Layout

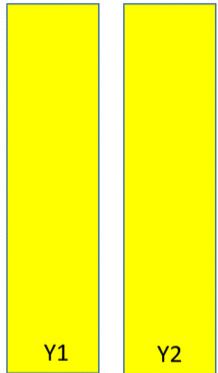

Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
Y1	1695-2690	1-2	AISG1	CPxxxxxxxxxxxxxxxxY1
Y2	1695-2690	3-4		

Left Bottom Right (Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration



## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2690 MHz

# VV-65B-R1

<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	400 W @ 50 °C

## Electrical Specifications

<b>Frequency Band, MHz</b>	<b>1695–1880</b>	<b>1850–1990</b>	<b>1920–2200</b>	<b>2300–2500</b>	<b>2500–2690</b>
<b>Gain, dBi</b>	18.3	18.7	19	19.2	19.3
<b>Beamwidth, Horizontal, degrees</b>	66	65	65	61	58
<b>Beamwidth, Vertical, degrees</b>	5.6	5.2	4.9	4.3	4.1
<b>Beam Tilt, degrees</b>	2–12	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	21	21	18	17	16
<b>Front-to-Back Ratio at 180°, dB</b>	32	34	36	35	36
<b>Isolation, Cross Polarization, dB</b>	30	30	30	30	30
<b>Isolation, Inter-band, dB</b>	30	30	30	30	30
<b>VSWR   Return loss, dB</b>	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
<b>PIM, 3rd Order, 2 x 40 W, dBc</b>	-153	-153	-153	-153	-153
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	300	300	250

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	663.0 N @ 150 km/h (149.0 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	140.0 N @ 150 km/h (31.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	803.0 N @ 150 km/h (180.5 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	404 mm   15.906 in
<b>Depth, packed</b>	278 mm   10.945 in
<b>Length, packed</b>	1923 mm   75.709 in
<b>Weight, gross</b>	23.3 kg   51.368 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value

# VV-65B-R1

---

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---

# BSAMNT-3

---



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.2 kg | 13.669 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 6.4 kg | 14.11 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

# BSAMNT-3

---

