

# UGGMXUCRH

Base Product



Ultra Low Loss (ULL) Singlemode MPO12 (Pinned) to Unconnectorized Pre-terminated Trunk Cable, 48-Fiber, Rollable Ribbon, Plenum, 12 fiber

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Black
Color, connector A	Green
Construction Type	Rollable ribbon   Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Male
Interface, Connector B	Unterminated
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	48

## Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

# UGGMXUCRH

## Ordering Tree

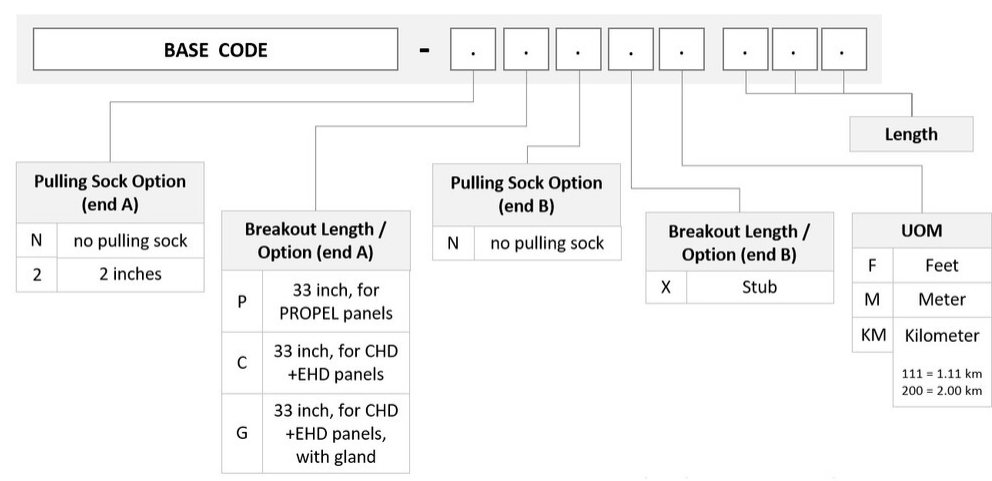

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor   Plenum

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

760251513 P-048-MP-RR-F12YL/8G1/99N	–	Indoor Plenum Rollable Ribbon Backbone Cable
860638317	–	MP012, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 3mm