

Fiber indoor/outdoor cable, TeraSPEED®, Single Jacket/Single Armor, Low Smoke Zero Halogen (LSZH), Singlemode G.652.D and G.657.A1, 144 fiber, Gel-Free, Stranded Loose Tube, Meters jacket marking, Black jacket color, Cca flame rating

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

## Product Classification

|                              |                                              |
|------------------------------|----------------------------------------------|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Europe |
| <b>Portfolio</b>             | CommScope®                                   |
| <b>Product Type</b>          | Fiber indoor/outdoor cable                   |
| <b>Product Series</b>        | Z-LA                                         |


## General Specifications

|                                     |                     |
|-------------------------------------|---------------------|
| <b>Armor Type</b>                   | Corrugated steel    |
| <b>Cable Type</b>                   | Stranded loose tube |
| <b>Construction Type</b>            | Armored             |
| <b>Subunit Type</b>                 | Gel-free            |
| <b>Filler, quantity</b>             | 0                   |
| <b>Jacket Color</b>                 | Black               |
| <b>Jacket Marking</b>               | Meters              |
| <b>Subunit, quantity</b>            | 12                  |
| <b>Fibers per Subunit, quantity</b> | 12                  |
| <b>Total Fiber Count</b>            | 144                 |

## Dimensions

|                                     |                    |
|-------------------------------------|--------------------|
| <b>Buffer Tube/Subunit Diameter</b> | 2.5 mm   0.098 in  |
| <b>Diameter Over Jacket</b>         | 18.7 mm   0.736 in |

## Representative Image

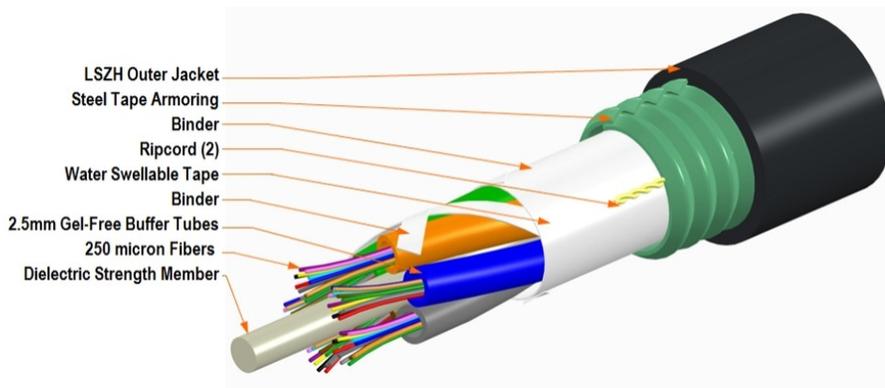

## Mechanical Specifications

|                                          |                           |
|------------------------------------------|---------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 280 mm   11.024 in        |
| <b>Minimum Bend Radius, unloaded</b>     | 187 mm   7.362 in         |
| <b>Tensile Load, long term, maximum</b>  | 800 N   179.847 lbf       |
| <b>Tensile Load, short term, maximum</b> | 2700 N   606.984 lbf      |
| <b>Compression</b>                       | 44 N/mm   251.246 lb/in   |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3  |
| <b>Flex</b>                              | 25 cycles                 |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6 |
| <b>Impact</b>                            | 5.15 N-m   45.581 in lb   |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4  |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1  |
| <b>Twist</b>                             | 10 cycles                 |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7  |
| <b>Vertical Rise, maximum</b>            | 229 m   751.312 ft        |

## Optical Specifications

|                   |                                              |
|-------------------|----------------------------------------------|
| <b>Fiber Type</b> | G.652.D and G.657.A1, TeraSPEED®   OS2   OS2 |
|-------------------|----------------------------------------------|

## Environmental Specifications

|                                 |                                      |
|---------------------------------|--------------------------------------|
| <b>Installation temperature</b> | -30 °C to +60 °C (-22 °F to +140 °F) |
| <b>Operating Temperature</b>    | -40 °C to +70 °C (-40 °F to +158 °F) |
| <b>Storage Temperature</b>      | -40 °C to +75 °C (-40 °F to +167 °F) |

# 810009788/DB | Z-144-LA-8W-M12BK/25D/C

|                                                     |                                                                                              |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>Cable Qualification Standards</b>                | ANSI/ICEA S-104-696   EN 187105   Telcordia GR-20   Telcordia GR-409                         |
| <b>EN50575 CPR Cable EuroClass Fire Performance</b> | Cca                                                                                          |
| <b>EN50575 CPR Cable EuroClass Smoke Rating</b>     | s1b                                                                                          |
| <b>EN50575 CPR Cable EuroClass Droplets Rating</b>  | d2                                                                                           |
| <b>EN50575 CPR Cable EuroClass Acidity Rating</b>   | a1                                                                                           |
| <b>Environmental Space</b>                          | Aerial, lashed   Buried   Low Smoke Zero Halogen (LSZH)                                      |
| <b>Flame Test Listing</b>                           | EN 50399   NEC OFC-ST1 (ETL) and c(ETL)                                                      |
| <b>Flame Test Method</b>                            | CSA FT4   EN 50399   IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 1202   NES 713   UL 1685 |
| <b>Jacket UV Resistance</b>                         | UV stabilized                                                                                |
| <b>Water Penetration</b>                            | 24 h                                                                                         |
| <b>Water Penetration Test Method</b>                | FOTP-82   IEC 60794-1 F5                                                                     |

## Environmental Test Specifications

|                                      |                                      |
|--------------------------------------|--------------------------------------|
| <b>Cable Freeze</b>                  | -2 °C   28.4 °F                      |
| <b>Cable Freeze Test Method</b>      | FOTP-98   IEC 60794-1 F15            |
| <b>Heat Age</b>                      | -40 °C to +85 °C (-40 °F to +185 °F) |
| <b>Heat Age Test Method</b>          | IEC 60794-1 F9                       |
| <b>Low High Bend</b>                 | -30 °C to +60 °C (-22 °F to +140 °F) |
| <b>Low High Bend Test Method</b>     | FOTP-37   IEC 60794-1 E11            |
| <b>Temperature Cycle</b>             | -40 °C to +70 °C (-40 °F to +158 °F) |
| <b>Temperature Cycle Test Method</b> | FOTP-3   IEC 60794-1 F1              |

## Packaging and Weights

|                     |                            |
|---------------------|----------------------------|
| <b>Cable weight</b> | 357 kg/km   239.893 lb/kft |
|---------------------|----------------------------|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>                                          |
|---------------|----------------------------------------------------------------|
| CENELEC       | EN 50575 compliant, Declaration of Performance (DoP) available |



## Included Products

CS-8W-IOLT – TeraSPEED® OS2 Singlemode Fiber

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable