UHVMPMXAH

Base Product



Ultra Low Loss (ULL) Multimode OM5 MPO12 (Unpinned) to MPO12 (Pinned), Armored Pre-terminated Trunk Cable, 48-Fiber, Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

Connector A, quantity 4

Color, boot A Black

Color, connector A Lime green

Connector B, quantity 4

Color, boot B Black

Color, connector B Lime green

Construction Type Armored | Stranded

Furcation Color Lime green

Interface, Connector A MPO-12/UPC Female

Interface Feature, connector A Unpinned

Interface, Connector B MPO-12/UPC Male

Interface Feature, connector B Pinned

Jacket Color Lime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 48




UHVMPMXAH

Dimensions

Breakout Length 33 in Cable Assembly Length Range (m) 3 - 999Cable Assembly Length Range (ft) 10 - 999

Ordering Tree

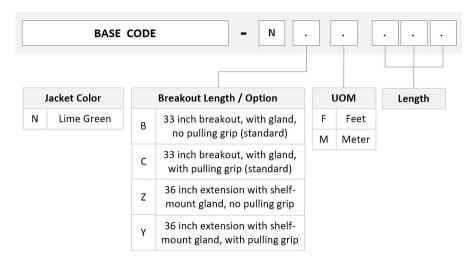

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode Multimode

Fiber Type OM5, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Included Products

Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, interlocking aluminum armored with 760230235 P-048-MZ-5G-F12LM

plenum jacket, Multimode OM5, 48 fiber multi-unit with 12 fiber subunits, Lime-green jacket

color, Feet cable marking

MPO12, ULTRA LOW LOSS, FEMALE, OM5, LIME, 3mm 860617232

Page 2 of 3

UHVMPMXAH

860617240

– MPO12, ULTRA LOW LOSS, MALE, OM5, LIME, 3mm

