


Base Product

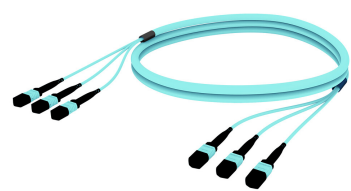

Ultra Low Loss (ULL) Multimode OM4 MPO12 (Pinned) to MPO12 (Pinned), Armored Pre-terminated Trunk Cable, 36-Fiber, Plenum

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Connector A, quantity	3
Color, boot A	Black
Color, connector A	Aqua
Connector B, quantity	3
Color, boot B	Black
Color, connector B	Aqua
Construction Type	Armored   Stranded
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC Male
Interface Feature, connector A	Pinned
Interface, Connector B	MPO-12/UPC Male
Interface Feature, connector B	Pinned
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	36

# UHXMXMXAG

## Dimensions

Breakout Length	33 in
Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

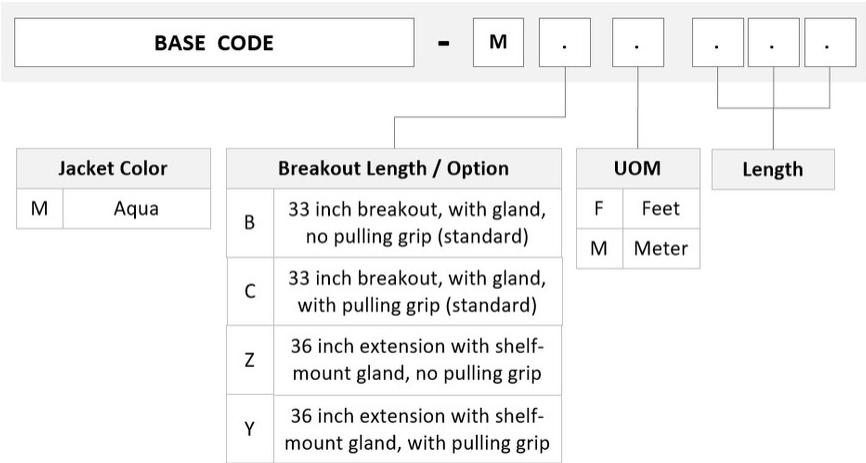

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM4, LazrSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Plenum

## Included Products

760120113	-	Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, interlocking aluminum armored with plenum jacket, Multimode OM4, 36 fiber multi-unit with 12 fiber subunits, gel-free, Feet jacket marking, Aqua jacket color
P-036-MZ-5K-F12AQ		
860366228	-	MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm