

FFV4S4-65B-R7-V2



20-port sector antenna, 4x 617-894, 8x 1695-2690 MHz 65° HPBW and 8x 3300-4000 MHz, Beamformer, 7x RET

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Cluster connectors for the beam-forming array, including eight RF ports plus one calibration port
- Beamforming array for 3300-4000 MHz, n77 and n78

General Specifications

Antenna Type	Sector and beamforming
Band	Multiband
Calibration Connector Interface	M-LOC
Calibration Connector Quantity	1
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female M-LOC
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	20

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	High band (1) Low band (2) Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W

FFV4S4-65B-R7-V2

Protocol 3GPP/AISG 2.0 (Single RET)

Dimensions

Width 498 mm | 19.606 in


Depth 197 mm | 7.756 in

Length 2000 mm | 78.74 in

Net Weight, antenna only 38 kg | 83.776 lb

TDD Column Spacing 41 mm | 1.614 in

Array Layout

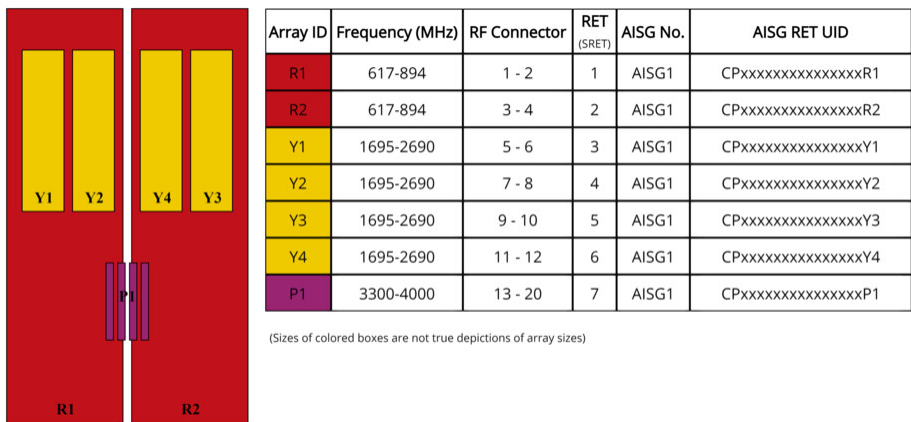

Port Configuration

FFV4S4-65B-R7-V2



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz 3300 – 4000 MHz 617 – 894 MHz
Polarization	±45°
Total Input Power, maximum	1,400 W @ 50 °C

Electrical Specifications

	R1,R2	R1,R2	Y1,Y3	Y1,Y3	Y1,Y3	Y1,Y3	Y2,Y4	Y2,Y4	Y2,Y4	Y2,Y4
Frequency Band, MHz	617–698	698–894	1695–1880	1850–1990	1920–2200	2490–2690	1695–1880	1850–1990	1920–2200	2490–2690
RF Port	1,2,3,4	1,2,3,4	5,6,9,10	5,6,9,10	5,6,9,10	5,6,9,10	7,8,11,12	7,8,11,12	7,8,11,12	7,8,11,12
Gain, dBi	13.8	14.8	15.9	16.3	16.5	17	15.8	16.1	16.5	16.7
Beamwidth, Horizontal, degrees	68	59	72	72	70	56	63	64	60	59
Beamwidth, Vertical, degrees	13.8	11.7	7.7	7.3	6.9	5.7	8.1	7.7	7.3	6.1
Beam Tilt, degrees	2–14	2–14	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First	17	16	17	19	18	19	16	18	17	18

FFV4S4-65B-R7-V2

Lobe), dB										
Front-to-Back Ratio at 180°, dB	28	29	33	32	31	26	34	37	37	30
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	200	200	200	200	200	200	200	200

Electrical Specifications

	P1	P1
Frequency Band, MHz	3300–3800	3700–4000
RF Port	13-20	13-20
Gain, dBi	15.8	16.1
Beamwidth, Horizontal, degrees	88	82
Beamwidth, Vertical, degrees	6.2	5.8
Beam Tilt, degrees	0–10	0–10
USLS (First Lobe), dB	14	14
Front-to-Back Ratio at 180°, dB	31	30
Coupling	26	26

FFV4S4-65B-R7-V2

level, Amp, Antenna port to Cal port, dB		
Coupling level, max Amp Δ, Antenna port to Cal port, dB	±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB	0.9	0.9
Coupler, max Phase Δ, Antenna port to Cal port, degrees	7	7
Isolation, Cross Polarization, dB	25	25
Isolation, Inter-band, dB	25	25
Isolation, Co- polarization, dB	19	19
VSWR Return loss, dB	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-140	-140
Input Power per Port at 50°C, maximum, watts	75	75

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3300–38003700–4000
------------------------	--------------------

FFV4S4-65B-R7-V2

Gain, dBi	17.5	18
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Vertical, degrees	6.3	5.9
Front-to-Back Total Power at 180° ± 30°, dB	27	27
USLS (First Lobe), dB	18	19

Electrical Specifications, Service Beam

Frequency Band, MHz	3300–38003700–4000	
Steered 0° Gain, dBi	20.5	20.7
Steered 0° Beamwidth, Horizontal, degrees	25	25
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	30	30
Steered 0° Horizontal Sidelobe, dB	14	14
Steered 30° Gain, dBi	19.6	20.2
Steered 30° Beamwidth, Horizontal, degrees	28	25
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	29	28

FFV4S4-65B-R7-V2

Electrical Specifications, Soft Split

Frequency Band, MHz	3300–38003700–4000	
Gain, dBi	19.5	19.9
Beamwidth, Horizontal, degrees	32	29
Front-to-Back Total Power at 180° ± 30°, dB	29	29
Horizontal Sidelobe, dB	21	20

Mechanical Specifications

Wind Loading @ Velocity, frontal	688.0 N @ 150 km/h (154.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	210.0 N @ 150 km/h (47.2 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	826.0 N @ 150 km/h (185.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	474.0 N @ 150 km/h (106.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	2187 mm 86.102 in
Weight, gross	51.8 kg 114.199 lb

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

* Footnotes

FFV4S4-65B-R7-V2

Performance Note Severe environmental conditions may degrade optimum performance