

# DFT-12SM-EAS



HELIAX® Discrete trunk, DLC to UPC 12-Fiber Cable Assembly. End one 6 SM fiber armored with weather proofing shroud DLC connectors. End two 6 SM fiber with UPC connectors. CPR rated Cca s1, d1, a1.

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Product Type</b>	Wireless Fiber Cable Assemblies
<b>Product Brand</b>	HELIAX®
<b>Product Series</b>	DFT
<b>Ordering Note</b>	Available in Central and Latin America, Europe, Middle East, Africa, and Asia Pacific

## General Specifications


<b>Construction Type</b>	Discrete fiber trunk
<b>Interface, Connector A</b>	DLC/UPC
<b>Interface Feature, connector A</b>	Weather shroud
<b>Interface Body Style, connector A</b>	Straight
<b>Interface, Connector B</b>	DLC/UPC
<b>Interface Feature, connector B</b>	Weather shroud
<b>Interface Body Style, connector B</b>	Straight
<b>Jacket Color</b>	Black
<b>Total Fibers, quantity</b>	12

## Dimensions

<b>Breakout Length, connector A</b>	999.998 mm   39.37 in
<b>Cable Assembly Length Range (m)</b>	0.5 – 300
<b>Diameter Over Jacket</b>	7 mm   0.276 in

## Ordering Tree

# DFT-12SM-EAS-60M

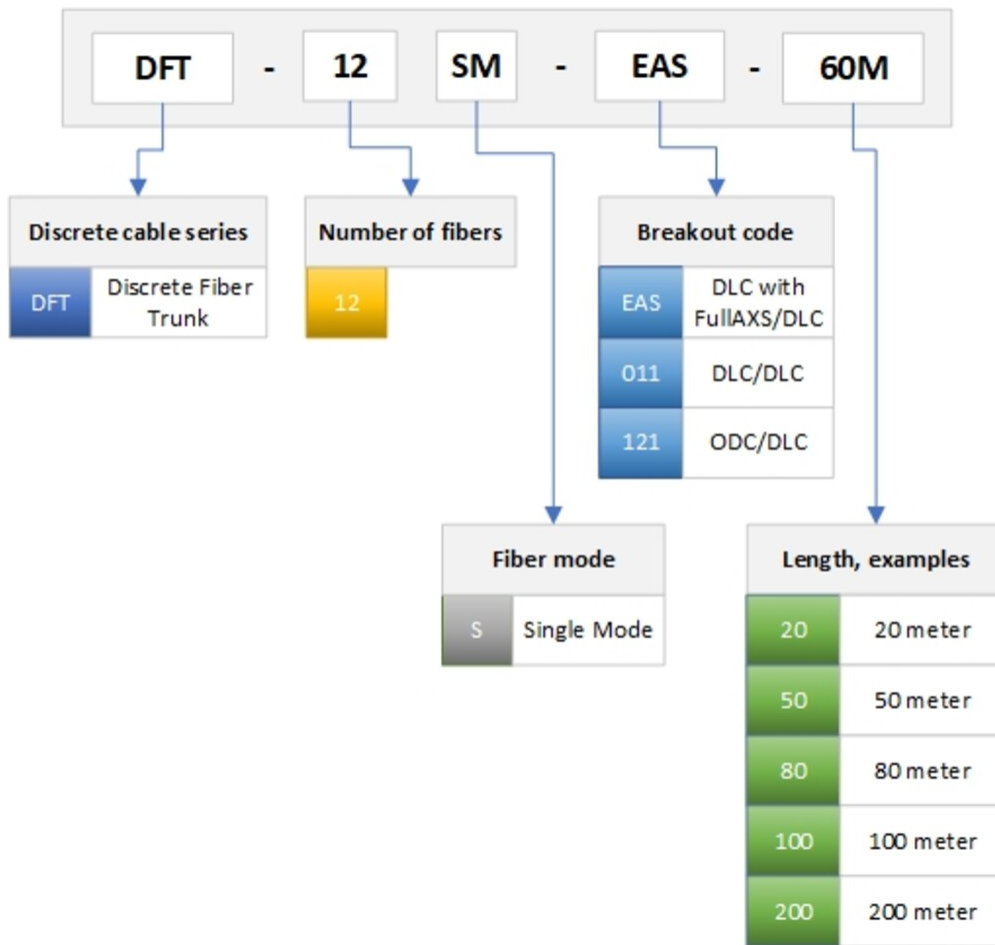

## Mechanical Specifications

**Minimum Bend Radius** 140 mm | 5.512 in

## Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2

## Environmental Specifications

**Operating Temperature** -40 °C to +80 °C (-40 °F to +176 °F)

**EN50575 CPR Cable EuroClass Fire Performance** Cca

**Environmental Space** Indoor/Outdoor

**Qualification Standards** IEC 60529:2001, IP67