

NNV4-65C-R6-HG



12-port sector antenna, 4x 698–896 and 8x 1695–2690 MHz, 65° HPBW, 6x RET.

- Antenna design optimized to offer high gain performances
- Excellent choice to maximize both coverage and capacity in suburban and rural applications

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Multi-RET)

Dimensions

NNV4-65C-R6-HG

Width 640 mm | 25.197 in
Depth 235 mm | 9.252 in
Length 2438 mm | 95.984 in


Array Layout

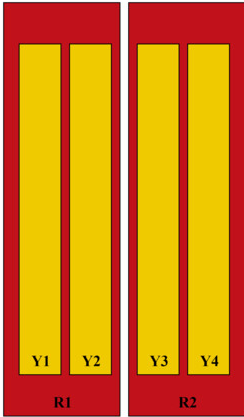

Array ID	Frequency (MHz)	RF Connector	RET (MRET)	AISG No.	AISG RET UID
R1	698-896	1 - 2	1	AISG1	CPxxxxxxxxxxxxMM.1
R2	698-896	3 - 4	2	AISG1	CPxxxxxxxxxxxxMM.2
Y1	1695-2690	5 - 6	3	AISG1	CPxxxxxxxxxxxxMM.3
Y2	1695-2690	7 - 8	4	AISG1	CPxxxxxxxxxxxxMM.4
Y3	1695-2690	9 - 10	5	AISG1	CPxxxxxxxxxxxxMM.5
Y4	1695-2690	11 - 12	6	AISG1	CPxxxxxxxxxxxxMM.6

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

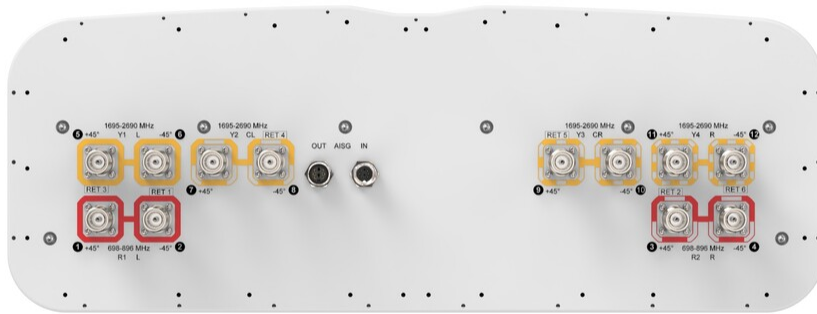

Electrical Specifications

Impedance 50 ohm

NNV4-65C-R6-HG

Operating Frequency Band	1695 – 2690 MHz 698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	698–806	824–896	1695–1880	1850–1990	1920–2200	2300–2360	2490–2690
Gain, dBi	16.2	16.6	19.3	19.6	19.9	19.9	19.8
Beamwidth, Horizontal, degrees	68	64	61	59	60	64	69
Beamwidth, Vertical, degrees	9.6	8.2	4.3	4.1	3.9	3.5	3.2
Beam Tilt, degrees	0–10	0–10	0–7	0–7	0–7	0–7	0–7
USLS (First Lobe), dB	18	18	22	24	22	19	17
Front-to-Back Ratio at 180°, dB	32	32	35	34	32	36	33
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	28	28	28	28	28
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	200	200	200	200	200	150	150

Mechanical Specifications

Wind Loading @ Velocity, frontal	1,055.0 N @ 150 km/h (237.2 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	355.0 N @ 150 km/h (79.8 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,433.0 N @ 150 km/h (322.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	1,086.0 N @ 150 km/h (244.1 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	752 mm 29.606 in
Depth, packed	382 mm 15.039 in
Length, packed	2590 mm 101.969 in
Weight, gross	89.5 kg 197.313 lb
Weight, net	65.5 kg 144.403 lb

NNV4-65C-R6-HG

Regulatory Compliance/Certifications

Agency

ISO 9001:2015

Classification

Designed, manufactured and/or distributed under this quality management system

Included Products

- | | | |
|-----------|---|--|
| BSAMNT-4 | - | Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set. |
| BSAMNT-M4 | - | Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set. |

* Footnotes

Performance Note

Severe environmental conditions may degrade optimum performance