

LightScope® ZWP Self-Supporting All-Dielectric Outdoor Drop Cable, 36 fiber Arid Core construction, central loose tube, no ripcords

- *Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

| | |
|--------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Portfolio | CommScope® |
| Product Type | Fiber drop cable |
| Product Series | O-DF |
| Government Requirements | Build America Buy America (BABA) compliant* |


General Specifications

| | |
|-------------------------------------|-------------------------|
| Cable Type | Central loose tube |
| Construction Type | Non-armored |
| Subunit Type | Gel-filled |
| Jacket Color | Black |
| Jacket Marking | Feet |
| Location of Manufacturing | Catawba, North Carolina |
| Subunit, quantity | 3 |
| Fibers per Subunit, quantity | 12 |
| Total Fiber Count | 36 |

Dimensions

| | |
|-------------------------------------|-------------------|
| Height Over Jacket | 4.5 mm 0.177 in |
| Buffer Tube/Subunit Diameter | 3 mm 0.118 in |
| Diameter Over Jacket | 8 mm 0.315 in |

Representative Image

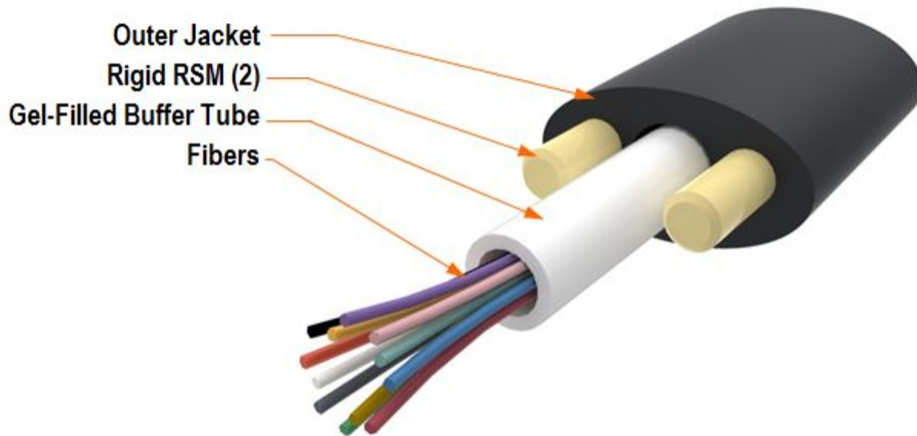

Material Specifications

Jacket Material PE

Mechanical Specifications

| | |
|--|---------------------------------------|
| Minimum Bend Radius, loaded | 90 mm 3.543 in |
| Minimum Bend Radius, unloaded | 64 mm 2.52 in |
| Tensile Load, long term, maximum | 400 N 89.924 lbf |
| Tensile Load, short term, maximum | 1334 N 299.895 lbf |
| Compression | 10 N/mm 57.101 lb/in |
| Compression Test Method | FOTP-41 IEC 60794-1 E3 |
| Flex | 35 cycles |
| Flex Test Method | FOTP-104 IEC 60794-1 E6 |
| Impact | 2.94 N-m 26.021 in lb |
| Impact Test Method | FOTP-25 IEC 60794-1 E4 |
| Strain | See long and short term tensile loads |
| Strain Test Method | FOTP-33 IEC 60794-1 E1 |
| Twist | 10 cycles |
| Twist Test Method | FOTP-85 IEC 60794-1 E7 |
| Vertical Rise, maximum | 1047 m 3,435.039 ft |

Optical Specifications

810010159/DB | O-036-DF-8W-F36NS/30T/200

Fiber Type G.652.D and G.657.A1 | G.652.D and G.657.A1

Environmental Specifications

| | |
|--------------------------------------|--------------------------------------|
| Installation temperature | -30 °C to +70 °C (-22 °F to +158 °F) |
| Operating Temperature | -40 °C to +70 °C (-40 °F to +158 °F) |
| Storage Temperature | -40 °C to +75 °C (-40 °F to +167 °F) |
| Cable Qualification Standards | ANSI/ICEA S-110-717 |
| Environmental Space | Aerial, self-support Buried |
| Jacket UV Resistance | UV stabilized |
| Water Penetration | 24 h |
| Water Penetration Test Method | FOTP-82 IEC 60794-1 F5 |

Environmental Test Specifications

| | |
|--------------------------------------|--------------------------------------|
| Cable Freeze | -2 °C 28.4 °F |
| Cable Freeze Test Method | FOTP-98 IEC 60794-1 F15 |
| Drip | 70 °C 158 °F |
| Drip Test Method | FOTP-81 IEC 60794-1 E14 |
| Heat Age | -40 °C to +85 °C (-40 °F to +185 °F) |
| Heat Age Test Method | IEC 60794-1 F9 |
| Low High Bend | -30 °C to +60 °C (-22 °F to +140 °F) |
| Low High Bend Test Method | FOTP-37 IEC 60794-1 E11 |
| Temperature Cycle | -40 °C to +70 °C (-40 °F to +158 °F) |
| Temperature Cycle Test Method | FOTP-3 IEC 60794-1 F1 |

Packaging and Weights

Cable weight 39 kg/km | 26.207 lb/kft

Included Products

CS-8S-200UM-LT – 200 Micron Low Macrobending, Dispersion-Unshifted OS2 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable