

CV5841-000 | FIST-FSASA3-SC-108-2P-S



FIST® Fiber Splice Tray with Field Installable Splitter, symmetrical ratio, two 1x8, Low loss Planar, grade P

Product Classification

Regional Availability	Asia Australia/New Zealand China EMEA India Latin America North America
Product Type	Splitter splice tray
Product Brand	FIST®
Product Series	FIST-FSASA3


General Specifications

Functionality	Splitting
Technology Type	Planar lightwave circuit (PLC)
Application	For use with BUDI fiber wall boxes For use with FIST fiber splice closures
Distribution Type	1 x 8 splitter (2)
Interface, Input	Stub tail
Interface, Output	Stub tail
Split Ratio	Symmetrical
Splitter, quantity	2

Dimensions

Pigtail Diameter	0.25 mm 0.01 in
Pigtail Diameter, Input	0.25 mm 0.01 in

Representative Image

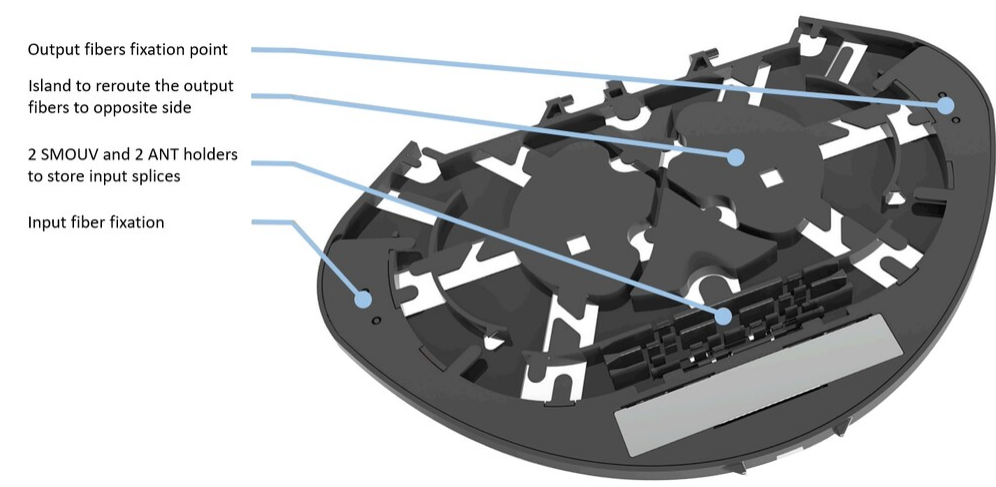

Optical Specifications

Directivity, minimum	55 dB
Performance Grade	Grade P (PLC, standard)
Polarization Dependent Loss, maximum	0.2 dB
Uniformity, maximum	1 dB
Wavelength Range	1260–1650 nm
Insertion Loss, Splitter, maximum	10.4 dB
Return Loss, Splitter, minimum	55 dB

Packaging and Weights

Packaging quantity	1
--------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

