# 760255331 | OCJ-EC-03MASHA-L1



Fiber Optic Patch Cord, Duplex, Singlemode, LSH/APC to LC/UPC, 1.8 mm diameter, yellow, 3m

#### **Product Classification**

Regional Availability EMEA

**Product Type** Fiber patch cord, duplex

**Product Series** OCJ

General Specifications

Connector A, quantity 2

Color, boot AGreenColor, connector AGreen

Connector B, quantity 2

Color, boot BBlueColor, connector BBlue

Interface, Connector A LSH/APC

Interface, Connector B LC/UPC

Jacket Color Yellow

Total Fibers, quantity 2

**Dimensions** 


Cord Length 3 m | 9.843 ft

**Diameter Over Jacket** 1.8 mm | 0.071 in

Ordering Tree



## 760255331 | OCJ-EC-03MASHA-L1

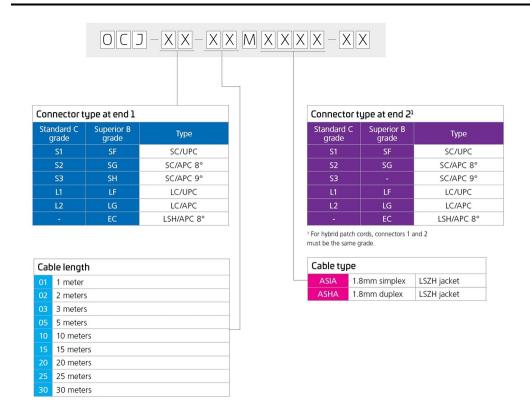

### **Optical Specifications**

**Fiber Mode** Singlemode

**Fiber Type** G.657.A1, TeraSPEED®

Performance Grade Standard C grade

Insertion Loss, maximum, connector A0.25 dBInsertion Loss, maximum, connector B0.5 dBReturn Loss, minimum, connector A60 dBReturn Loss, minimum, connector B50 dB

### **Environmental Specifications**

**Operating Temperature**  $-40 \,^{\circ}\text{C} \text{ to } +70 \,^{\circ}\text{C} \, (-40 \,^{\circ}\text{F to } +158 \,^{\circ}\text{F})$ 

**Environmental Space** Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Packaging quantity

COMMSC PE®

# 760255331 | OCJ-EC-03MASHA-L1

### Regulatory Compliance/Certifications

#### Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



#### \* Footnotes

**Performance Grade** Guarantee to meet IEC 61755-1 Random Mating requirement

