UHXMXMXCM

Base Product



Ultra Low Loss (ULL) OM4 MPO12 UPC (pinned) to MPO12 UPC (pinned) Fiber Trunk Cable Assembly, 144-Fiber, Armored Indoor Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering NoteFor additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Connector A, quantity 12

Color, boot A Black

Color, connector A Aqua

Connector B, quantity 12

Color, boot B Black

Color, connector B Aqua

Construction Type Armored | Stranded

Furcation Color Aqua

Interface, Connector A MPO-12/UPC Male
Interface, Connector B MPO-12/UPC Male

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 144

Dimensions

Breakout Length 22 in

COMMSC PE®

UHXMXMXCM


Cable Assembly Length Range (m)

3 - 305

Cable Assembly Length Range (ft)

10 - 999

Ordering Tree

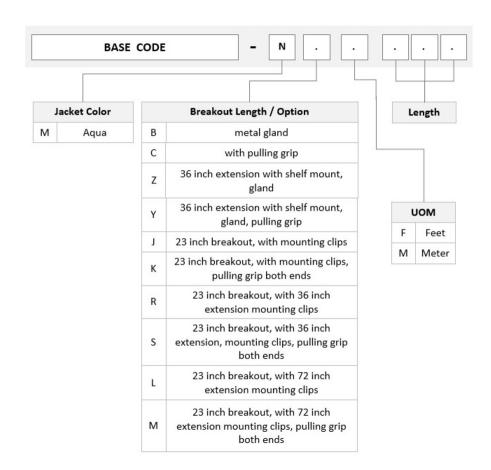

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

COMMSCOPE®

UHXMXMXCM

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency Classification

ANATEL Compliant

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



Included Products

760242138 – Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, interlocking aluminum armored with P-144-MZ-5K-F12AQ/20T plenum jacket, Multimode OM4, 144 fiber multi-unit with 12 fiber subunits, gel-free, Feet jacket

marking, Aqua jacket color

860659006 – MPO12, ULL, MALE, OM3/4, AQUA, 2MM

