


# U4GQXLUTR

Base Product



Singlemode MPO8 APC pinned to LC/UPC Uniboot Ruggedized fanout Cable, 16-Fiber, LSZH, 8 fiber PmP 2.0 mm /B2ca

## Product Classification

Regional Availability	Europe
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	Propel   SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Connector A, quantity	2
Color, boot A	Gray
Color, connector A	Green
Connector B, quantity	16
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC Male
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	8
Total Fibers, quantity	16

## Dimensions

# U4GQXLUTR

Breakout Length	22 in
Cable Assembly Length Range (m)	3 – 305
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

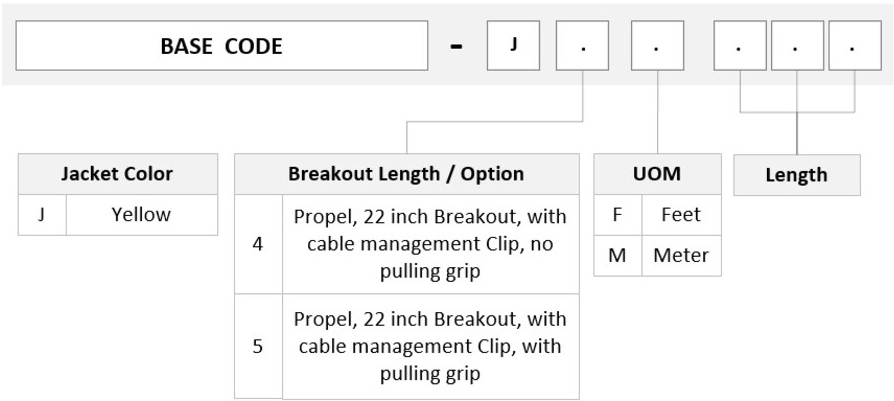

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	B2ca
Environmental Space	Dual Rated LSZH/Riser   Indoor

## Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted

# U4GQXLUTR

---


UK-ROHS

Compliant/Exempted



## Included Products

- |                           |   |  |
|---------------------------|---|--|
| 760254314                 | – | Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 16 fiber with 8 fiber 2.0 mm subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating |
| N-016-MP-8G1-F08YL/20T/B2 |   |  |
| 860658160                 | – | LC/UPC Uniboot Connector, Singlemode, Blue   |
| 860659022                 | – | MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm   |



Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 16 fiber with 8 fiber 2.0 mm subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP

General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	2
Fibers per Subunit, quantity	8
Total Fiber Count	16

Dimensions

Height Over Jacket	5.4 mm   0.213 in
Width Over Jacket	7.4 mm   0.291 in
Buffer Tube/Subunit Diameter	2 mm   0.079 in

Mechanical Specifications

Minimum Bend Radius, loaded	81 mm   3.189 in
Minimum Bend Radius, unloaded	54 mm   2.126 in
Tensile Load, long term, maximum	200 N   44.962 lbf

# 760254314 | N-016-MP-8G1-F08YL/20T/B2

---

<b>Tensile Load, short term, maximum</b>	667 N   149.948 lbf
<b>Compression</b>	10 N/mm   57.101 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	25 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	437 m   1,433.727 ft

## Optical Specifications

<b>Fiber Type</b>	G.657.A2/B2
-------------------	-------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	B2ca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1a
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d0
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2

## Environmental Test Specifications

<b>Low High Bend</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

Packaging and Weights

**Cable weight**

46.7 kg/km | 31.381 lb/kft

\* Footnotes

**Operating Temperature**

Specification applicable to non-terminated bulk fiber cable



LC/UPC Uniboot Connector, Singlemode, Blue

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Blue
Color, housing	Blue
Interface	LC/UPC

Dimensions

Length	64 mm   2.52 in
Compatible Cable Diameter	1.6 mm   0.063 in   2 mm   0.079 in

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Mode	Singlemode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D   IEC 61753-1
Insertion Loss Change, temperature	0.2 dB
Insertion Loss, ULL, maximum	0.25 dB
Return Loss, minimum	55 dB

Regulatory Compliance/Certifications


Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



\* Footnotes

<b>Insertion Loss Change, mating</b>	TIA-568: Maximum insertion loss change after 500 matings
<b>Insertion Loss Change, temperature</b>	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)





MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	TeraSPEED®

General Specifications

Color	Green
Color, boot	Black
Ferrule Geometry	Angled
Interface	MPO/APC Male
Interface Feature	Pinned
Total Fiber Count	8

Dimensions

Compatible Cable Diameter	2 mm   0.079 in
---------------------------	-----------------

Material Specifications

Ferrule Material	Polymer
------------------	---------

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2
Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss, maximum	0.35 dB
Return Loss, minimum	65 dB

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

