## **UHGMXMXCP**

#### **Base Product**



# Singlemode MPO12 APC (pinned) to MPO12 APC (pinned) Fiber Trunk Cable Assembly, 288-Fiber, Armored Indoor Plenum

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

#### General Specifications

Connector A, quantity 24

Color, boot A Black

Color, connector A Green

Connector B, quantity 24

Color, boot B Black
Color, connector B Green

Construction Type Armored | Stranded

Furcation Color Yellow

 Interface, Connector A
 MPO-12/APC Male

 Interface, Connector B
 MPO-12/APC Male

Jacket Color Yellow

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 288

Dimensions

Cable Assembly Length Range (m) 3 - 999


COMMSCOPE®

# **UHGMXMXCP**

#### Cable Assembly Length Range (ft)

10 - 999

## Ordering Tree

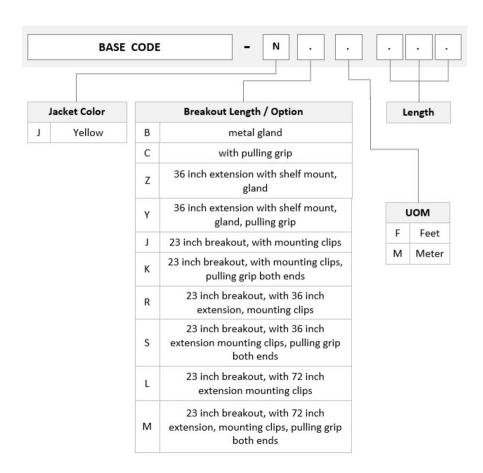

## Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0  $^{\circ}$  | 4.40 lb @ 90  $^{\circ}$ 

Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

### **Environmental Specifications**

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

**COMMSCOPE®** 

# **UHGMXMXCP**

## Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



#### Included Products

760252662 – Fiber indoor cable, TeraSPEED® Plenum MPO Trunk, interlocking aluminum armored with

plenum jacket, 288 fiber multi-unit with 12 fiber subunits, Singlemode and G.657.A2, Feet jacket

marking, Yellow jacket color

860659010 – MPO-12, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm

