# UHVMXUCCL

#### **Base Product**



Ultra Low Loss (ULL) OM5 MPO12 UPC (pinned) to Unconnectorized Fiber Trunk Cable Assembly, 96-Fiber, Armored Indoor Plenum

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

### General Specifications

Connector A, quantity 8

Color, boot A Black

Color, connector A Lime green

Connector B, quantity 0

Construction Type Armored | Stranded

Furcation Color Lime green

Interface, Connector A MPO-12/UPC Male

Interface, Connector BUnterminatedJacket ColorLime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 96


#### **Dimensions**

Breakout Length22 inCable Assembly Length Range (m)3 - 305Cable Assembly Length Range (ft)10 - 999

**COMMSCOPE®** 

# UHVMXUCCL

## Ordering Tree

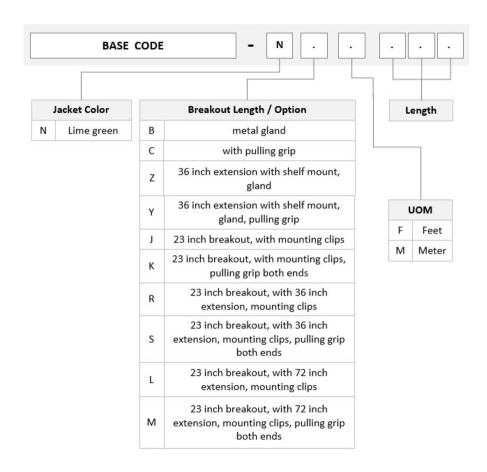

### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

**Optical Specifications** 

Fiber Mode Multimode

**Fiber Type** OM5, LazrSPEED®

### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C to } +60 \,^{\circ}\text{C (+14 }^{\circ}\text{F to } +140 \,^{\circ}\text{F)}$ 

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications



# **UHVMXUCCL**

Agency Classification

ANATEL Compliant

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted





760242137 – Fiber indoor cable, LazrSPEED® Plenum MPO Trunk, interlocking aluminum armored with P-096-MZ-5G-F12LM/20T plenum jacket, Multimode OM5, 96 fiber multi-unit with 12 fiber subunits, Lime-green jacket

color, Feet cable marking

860659008 – MPO12, ULL, MALE, OM5, LIME, 2MM

