


# ULGMXLCAK

Base Product

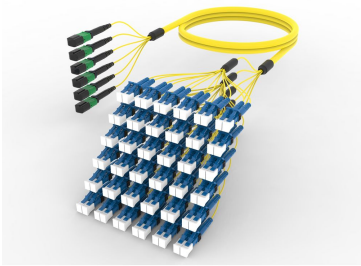

Ultra Low Loss ULL TeraSPEED® MPO(Pinned) to LC/UPC Ruggedized fanout Cable, 72-Fiber, Plenum, 12 fiber

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Black
Color, connector A	Green
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Male
Interface, Connector B	LC/UPC
Interface Feature, connector B	ULL
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	72

# ULGMXLCAK

## Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

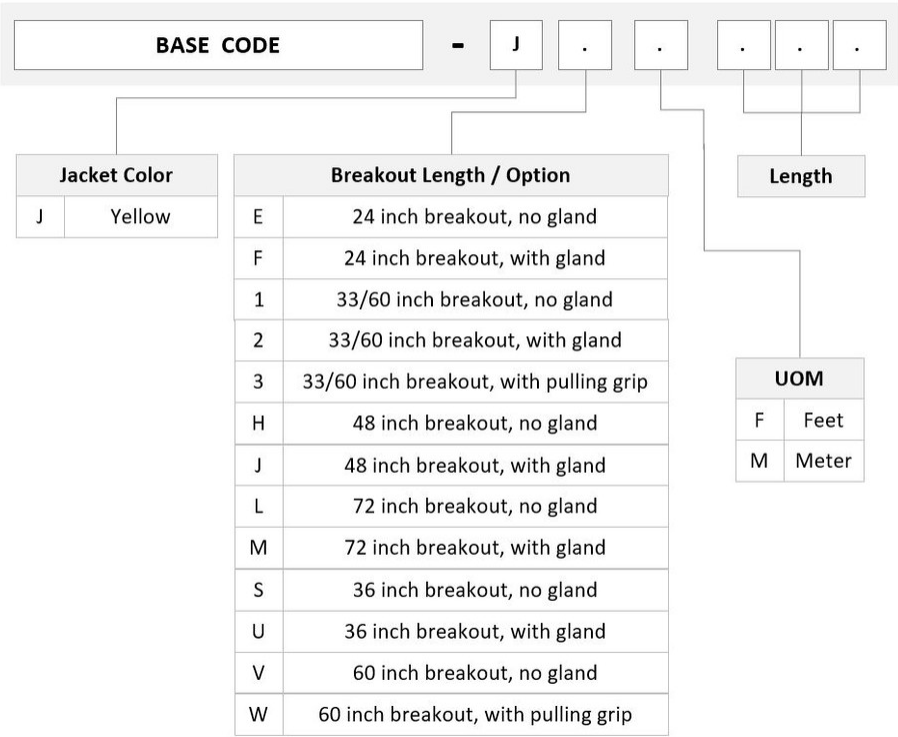

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	Dca
Environmental Space	Indoor   Plenum

## Regulatory Compliance/Certifications


# ULGMXLCAK

Agency	Classification
ANATEL	Compliant
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## Included Products

760237968 P-072-MP-8G1-F12YL	– Fiber indoor cable, Plenum MPO Trunk, 72 fiber multi-unit with 12 fiber subunits, Singlemode G. 657.A2/B2, Feet jacket marking, Yellow jacket color
---------------------------------	---

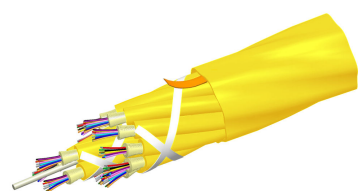

Fiber indoor cable, Plenum MPO Trunk, 72 fiber multi-unit with 12 fiber subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	6
Fibers per Subunit, quantity	12
Total Fiber Count	72

Dimensions

Buffer Tube/Subunit Diameter	3 mm   0.118 in
Diameter Over Jacket	10.7 mm   0.421 in

Representative Image

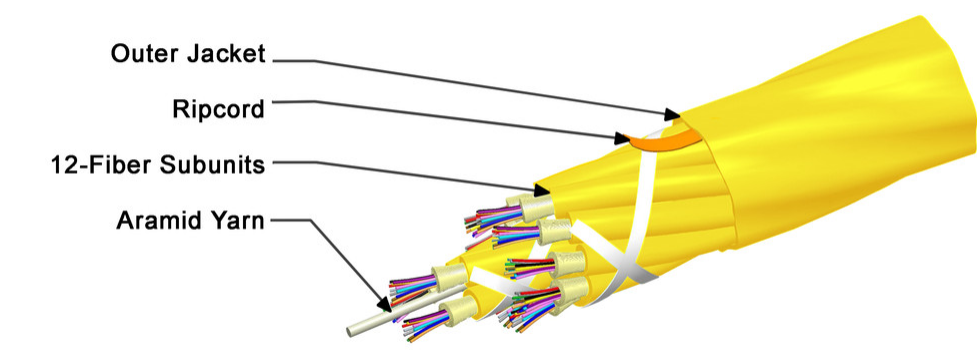

## Mechanical Specifications

Minimum Bend Radius, loaded	161 mm   6.339 in
Minimum Bend Radius, unloaded	107 mm   4.213 in
Tensile Load, long term, maximum	400 N   89.924 lbf
Tensile Load, short term, maximum	1335 N   300.12 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	368 m   1,207.349 ft

## Optical Specifications

Fiber Type	G.657.A2/B2   G.657.A2/B2
------------	---------------------------

## Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
--------------------------	------------------------------------

Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	111 kg/km   74.589 lb/kft
--------------	---------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant



\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable