

# PPLARV8LCQX8

Propel ULL Multimode OM5 Cabled Module, 1x8 duplex LC Propel module on End A to 1x8f MPO /UPC pinned on End B, 8 fiber LSZH Patchcord, Method A

- This component requires 2 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method A polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	SYSTIMAX®
Product Type	Fiber cabled module
Product Brand	Propel
Product Series	PPL
Ordering Note	Modules with patch cord cable are single subunit, and have no additional outer jacket

## General Specifications


Configuration Type	PROPEL Module to MPO Connector
Cable Color	Lime green
Cable Type	Patch cord LSZH
Interface, front	LC/UPC
Interface Feature, front	Duplex   Shuttered
Interface Color, front	Lime green
Interface, rear	MPO-08/UPC Male
Interface Feature, rear	Key up/down   Pinned
Module Size, end A	8 fiber
Module Size, end B	8 fiber
Module Quantity, end A	1
Module Quantity, end B	1
Polarity	Method A
Total Fibers, quantity	8
Total Ports, quantity, front	4

# PPLARV8LCQX8

## Dimensions

Height	11 mm   0.433 in
Width	65 mm   2.559 in
Depth	170 mm   6.693 in
Breakout Length, end B	12 in   120 in   33 in   36 in   48 in   60 in   72 in
Cable Assembly Length Range (m)	1 – 400
Cable Assembly Length Range (ft)	2 – 999

## Ordering Tree

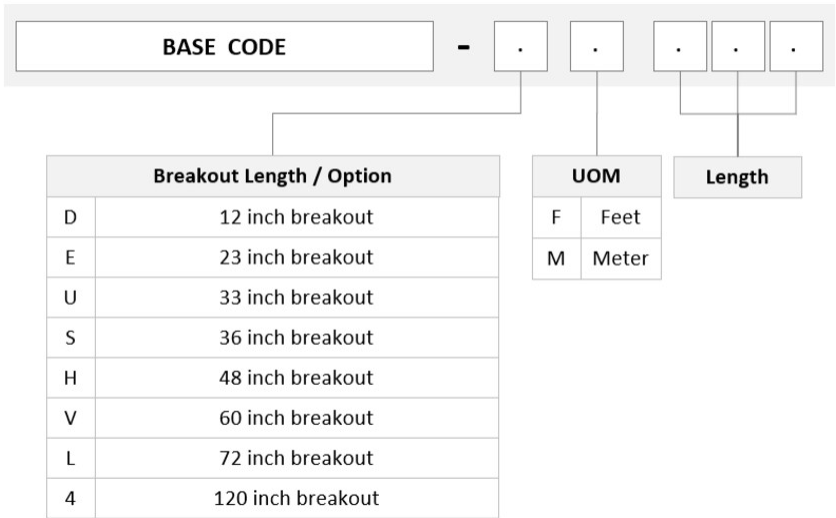

## Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM5
Insertion Loss, maximum	0.35 dB

## Environmental Specifications

Qualification Standards	IEC 61753-1   TIA-568.3-D
Safety Standard	c-UL-us

## Packaging and Weights

Packaging quantity	1
--------------------	---

# PPLARV8LCQX8


## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

760248404 N-008-MP-5G-F20LM/E	– LazrSPEED® Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 8 fiber
----------------------------------	--



LazrSPEED® Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 8 fiber

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Total Fiber Count	8

Dimensions

Diameter Over Armor	2 mm   0.079 in
---------------------	-----------------

Representative Image

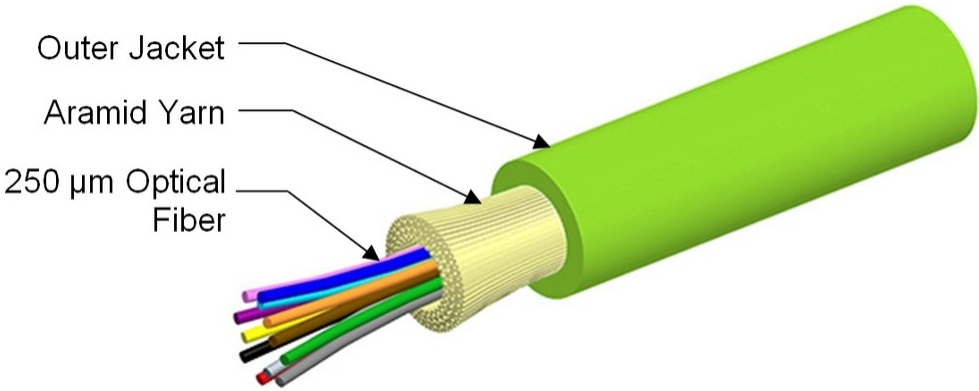

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	38 mm   1.496 in
<b>Minimum Bend Radius, unloaded</b>	16 mm   0.63 in
<b>Tensile Load, long term, maximum</b>	33 N   7.419 lbf
<b>Tensile Load, short term, maximum</b>	111 N   24.954 lbf
<b>Compression</b>	4 N/mm   22.841 lb/in
<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	300 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	0.74 N-m   6.55 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	500 m   1,640.42 ft

## Optical Specifications

<b>Fiber Type</b>	OM5, LazrSPEED® wideband   OM5, LazrSPEED® wideband
-------------------	---

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Eca
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)   Riser
<b>Flame Test Listing</b>	NEC OFNR-ST1 (ETL) and c(ETL)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685

## Environmental Test Specifications

<b>Heat Age</b>	0 °C to +85 °C (+32 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9

Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	3.7 kg/km   2.486 lb/kft
--------------	--------------------------

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable