## PPLU3G8LCUCS



Propel ULL Singlemode Cabled Module, 4x8 duplex LC Propel module on End A to Stub on End B, 32 fiber B2ca Trunk, Method B Enhanced

- This component requires 8 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

**Product Type** Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

#### General Specifications

**Configuration Type** PROPEL Module to Stub

Cable Color Yellow

Cable Type Trunk Cable - LSZH Class B2ca

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, frontBlueInterface, rearStubModule Size, end A8 fiberModule Quantity, end A4

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 32

Total Ports, quantity, front 16

Dimensions

 Height
 11 mm | 0.433 in

 Width
 98 mm | 3.858 in

Page 1 of 3



## PPLU3G8LCUCS


**Depth** 170 mm | 6.693 in

Breakout Length, end B 0 in

Cable Assembly Length Range (m) 1 - 400

Cable Assembly Length Range (ft) 2 - 999

### Ordering Tree

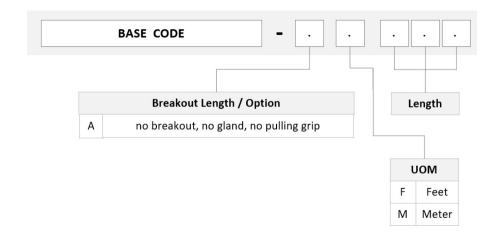

#### **Optical Specifications**

**Fiber Mode** Singlemode

Fiber Type OS2
Insertion Loss, maximum 0.6 dB

### **Environmental Specifications**

**Qualification Standards** IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity 1

## Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

Page 2 of 3



# PPLU3G8LCUCS



#### Included Products

760254316 N-032-MP-8G1-F08YL/20T/B2 Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 32 fiber with 2.0 mm Subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating

