

# PPLURGDLCUCD



Propel ULL Singlemode Cabled Module, 1x12 duplex LC Propel module on End A to Stub on End B, 12 fiber LSZH Patchcord, Method B Enhanced

- This component requires 3 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	SYSTIMAX®
Product Type	Fiber cabled module
Product Brand	Propel
Product Series	PPL
Ordering Note	Modules with patch cord cable are single subunit, and have no additional outer jacket

## General Specifications

Configuration Type	PROPEL Module to Stub
Cable Color	Yellow
Cable Type	Patch cord LSZH
Interface, front	LC/UPC
Interface Feature, front	Duplex   Shuttered
Interface Color, front	Blue
Interface, rear	Stub
Module Size, end A	12 fiber
Module Quantity, end A	1
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	12
Total Ports, quantity, front	6


## Dimensions

Height	11 mm   0.433 in
Width	65 mm   2.559 in

# PPLURGDLCUCD

Depth	170 mm   6.693 in
Breakout Length, end B	0 in
Cable Assembly Length Range (m)	1 – 400
Cable Assembly Length Range (ft)	2 – 999

## Ordering Tree

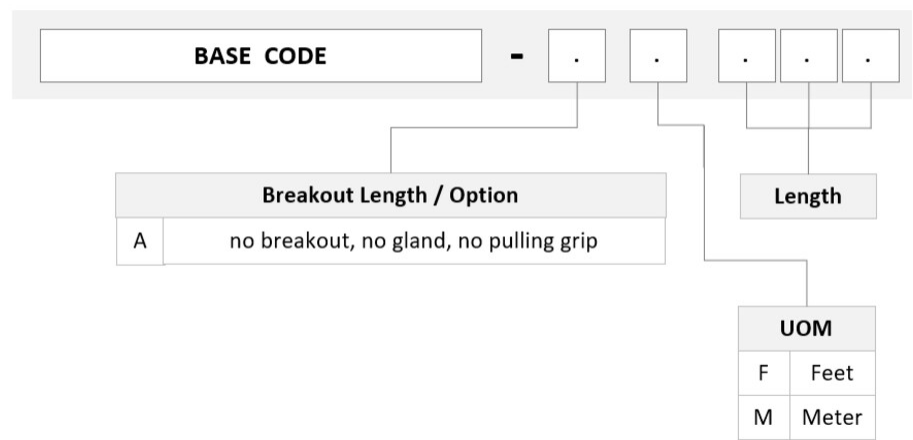

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	OS2
Insertion Loss, maximum	0.6 dB

## Environmental Specifications

Qualification Standards	IEC 61753-1   TIA-568.3-D
Safety Standard	c-UL-us

## Packaging and Weights

Packaging quantity	1
--------------------	---


## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- 760245203 – Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 12 fiber
- N-012-MP-8G1-F20YL/E

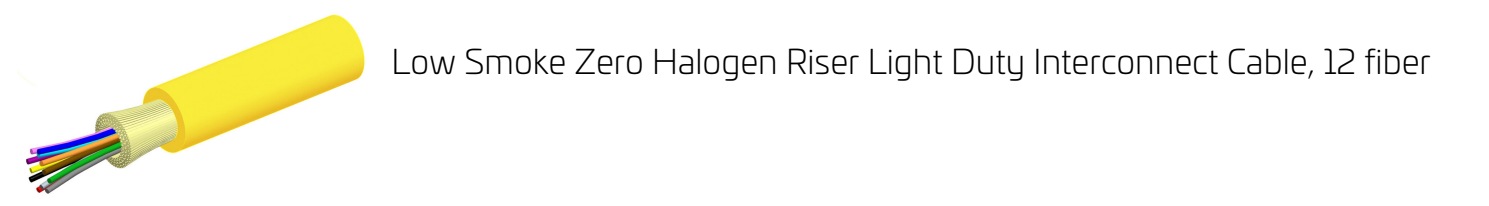

Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 12 fiber

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Total Fiber Count	12

Dimensions

Diameter Over Armor	2 mm   0.079 in
---------------------	-----------------

Representative Image

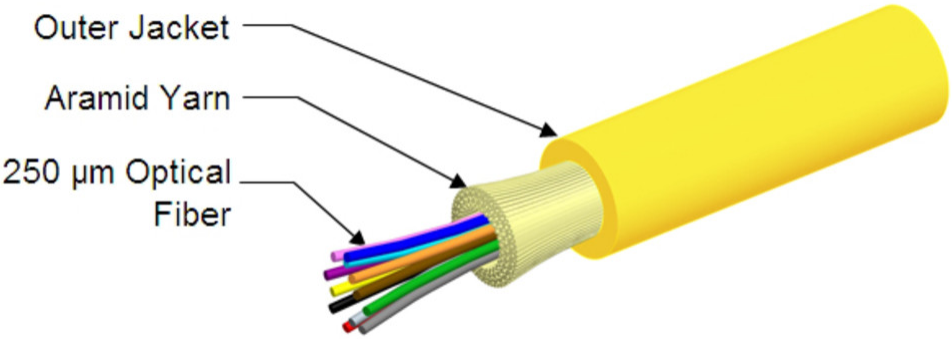

### Mechanical Specifications

Minimum Bend Radius, loaded	38 mm   1.496 in
Minimum Bend Radius, unloaded	16 mm   0.63 in
Tensile Load, long term, maximum	33 N   7.419 lbf
Tensile Load, short term, maximum	111 N   24.954 lbf
Compression	4 N/mm   22.841 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	500 m   1,640.42 ft

### Optical Specifications

Fiber Type	G.657.A2/B2   G.657.A2/B2
------------	---------------------------

### Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	Eca
Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Flame Test Listing	NEC OFNR-ST1 (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685

### Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9

# 760245203 | N-012-MP-8G1-F20YL/E

Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

Cable weight	3.7 kg/km   2.486 lb/kft
--------------	--------------------------

## Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable