
# **ULGMPLUCP**

#### **Base Product**



Ultra Low Loss ULL TeraSPEED® MPO(Unpinned) to LC/UPC Uniboot Ruggedized fanout Cable, 288-Fiber, Plenum, 12 fiber PmP 2.0 mm Dca

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle

East/Africa | North America

Portfolio CommScope®

Product Type Ruggedized fanout

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales

Representative | For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

### General Specifications

Color, boot A Black

Color, connector A Green

Color, boot B Blue

Color, connector B Blue

Construction Type Stranded

Furcation Color Yellow

Interface, Connector A MPO-12/APC Female

Interface, Connector B LC/UPC

Interface Feature, connector B Uniboot

Jacket Color Yellow

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 288

**Dimensions** 

Cable Assembly Length Range (m) 2 – 999


**COMMSCOPE®** 

## ULGMPLUCP

#### Cable Assembly Length Range (ft)

7 – 999

## Ordering Tree

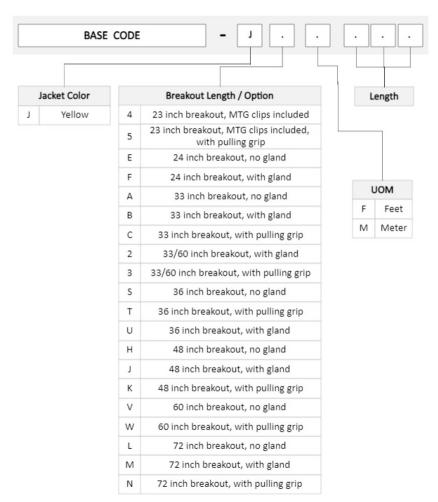

### **Optical Specifications**

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C} \text{ to } +60 \,^{\circ}\text{C} \, (+14 \,^{\circ}\text{F to } +140 \,^{\circ}\text{F})$ 

EN50575 CPR Cable EuroClass Fire Performance Dca

Environmental Space Indoor | Plenum

COMMSC PE®

# ULGMPLUCP

## Regulatory Compliance/Certifications

Classification **Agency** 

CHINA-ROHS Below maximum concentration value

Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

**REACH-SVHC** Compliant as per SVHC revision on www.commscope.com/ProductCompliance

**ROHS** Compliant **UK-ROHS** Compliant



ANATEL

#### Included Products

Fiber indoor cable, Plenum MPO Trunk, 288 fiber multi-unit with 12 fiber subunits, Singlemode 760246051 P-288-MP-8G1-F12YL/20T

G.657.A2/B2, Feet jacket marking, Yellow jacket color

LC/UPC Uniboot Connector, Singlemode, Blue 860658160 MPO12, ULL, FEMALE, SM, GREEN, 2MM 860659016

