


Base Product



Ultra Low Loss Singlemode MPO8 Pinned to MPO8 Pinned 1728-Fiber Pre-terminated Trunk Cable, Low Smoke Zero Halogen/Riser

Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Gray
Color, connector A	Green
Color, boot B	Gray
Color, connector B	Green
Construction Type	Rollable ribbon
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC Male
Interface Feature, connector A	Angled
Interface, Connector B	MPO-08/APC Male
Interface Feature, connector B	Angled
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	1728

Dimensions

# UJGQXQXRY

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

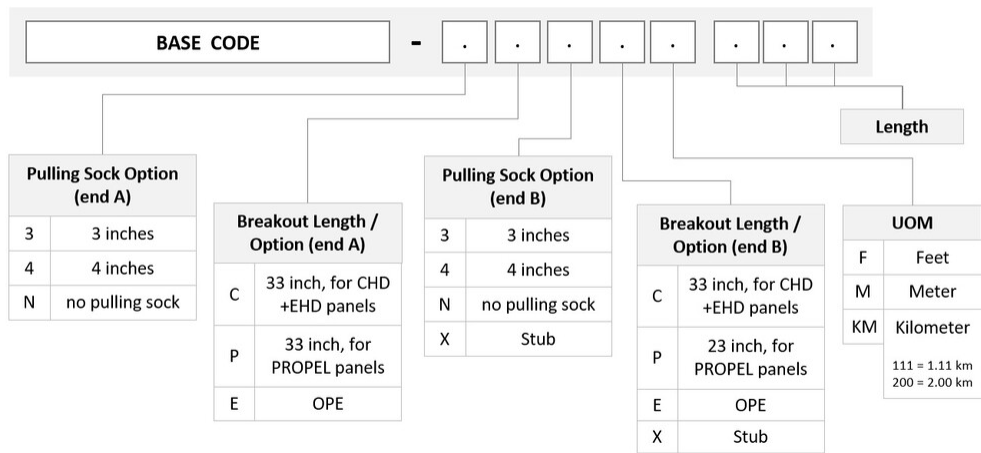

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Dual Rated LSZH/Riser

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

460202379	–	MP08/12 ULL Male, Singlemode, Yellow, Push-Pull, 3mm
760244182	–	Fiber indoor cable, All-Dielectric, LSZH Riser-Rated, Gel-Free, Loose Tube Rollable Ribbon, 1728 fiber, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color
N-1728-LN-RR-F12YL/8G/99H/C		