UHGMPMPCK

Base Product



Ultra Low Loss, Singlemode MPO12 APC (unpinned) to MPO12 APC (unpinned) Fiber Trunk Cable Assembly, 72-Fiber, Armored Indoor Plenum

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration

General Specifications

Connector A, quantity 6

Color, boot A Black

Color, connector A Lime green

Connector B, quantity 6

Color, boot B Black

Color, connector B Lime green

Construction Type Armored | Stranded

Furcation Color Lime green

Interface, Connector A MPO-12/UPC Female

Interface Feature, connector A Unpinned

Interface, Connector B MPO-12/UPC Female

Interface Feature, connector BUnpinnedJacket ColorLime green

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 72




UHGMPMPCK

Dimensions

Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 - 999

Ordering Tree

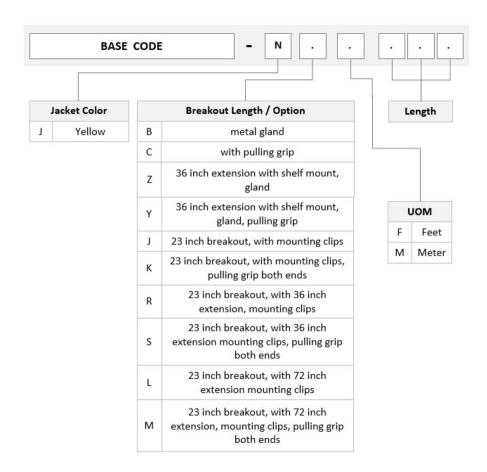

Mechanical Specifications

Cable Retention Strength, maximum $11.24 \text{ lb} @ 0 \degree | 4.40 \text{ lb} @ 90 \degree$

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED® | OM5, LazrSPEED®

Environmental Specifications

COMMSCOPE®

UHGMPMPCK

Operating Temperature

-10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space

Indoor | Plenum

