

# UKGMMPMXCD

Base Product



Ultra Low Loss (ULL) Singlemode MPO12 (Unpinned) to MPO12 (Pinned), Armored Pre-terminated Trunk Cable, 12-Fiber, Low Smoke Zero Halogen (LSZH)

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration   Not available in the United States or Canada

## General Specifications

Connector A, quantity	1
Color, boot A	Black
Color, connector A	Green
Connector B, quantity	1
Color, boot B	Black
Color, connector B	Green
Construction Type	Armored   Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Female
Interface Feature, connector A	Unpinned
Interface, Connector B	MPO-12/APC Male
Interface Feature, connector B	Pinned
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)


# UKGMPMXCD

Fibers per Subunit, quantity	12
Total Fibers, quantity	12

## Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

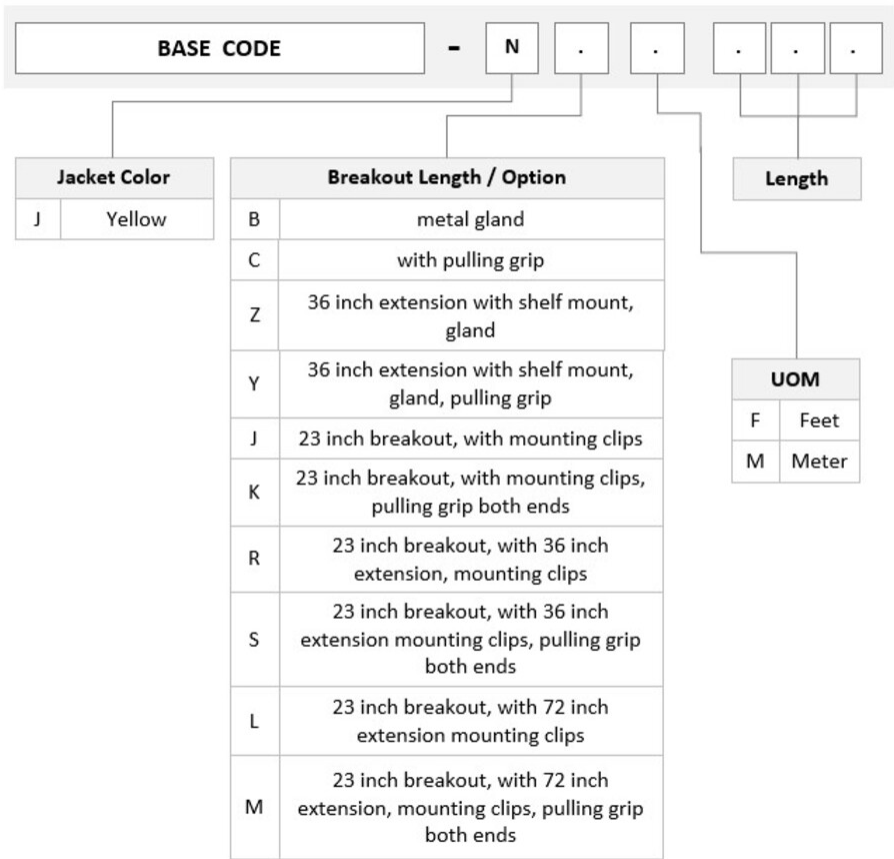

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

# UKGMPMXCD

---

## Environmental Specifications

<b>Operating Temperature</b>	-10 °C to +60 °C (+14 °F to +140 °F)
<b>Environmental Space</b>	Dual Rated LSZH/Riser

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

