

1.8m | 6ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 5.925 – 7.125 GHz, white, PDR70 flange

1.8°

#### **Product Classification**

**Product Type** Microwave antenna

**Product Brand** Sentinel®

General Specifications

**Antenna Type** USX - Sentinel® Ultra High Performance, Super

High XPD Antenna, dual-polarized

**Polarization** Dual PDR70 **Antenna Input Antenna Color** White

**Reflector Construction** One-piece reflector

**Radome Color** Gray **Radome Material** Fabric

Side Struts, Included 1 Side Struts, Optional 1

Dimensions

Diameter, nominal 1.8 m | 6 ft

**Electrical Specifications** 

5.925 - 7.125 GHz **Operating Frequency Band** 

38.3 dBi Gain, Low Band Gain, Mid Band 38.8 dBi 39.3 dBi Gain, Top Band **Boresite Cross Polarization Discrimination (XPD)** 40 dB 76 dB Front-to-Back Ratio

1.8° Beamwidth, Horizontal Beamwidth, Vertical

Return Loss 26 dB

**VSWR** 1.1

Radiation Pattern Envelope Reference (RPE) 7373

Electrical Compliance ACMA FX03\_6b, 6p7b | Brazil Anatel Class

2 | ETSI 302 217 Class 4 | IC 3059A | IC

3064A | US FCC Part 101A

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 3

Electrical Specifications, Band 2

**Operating Frequency Band** 5.725 – 5.850 GHz

Gain, Mid Band 37.9 dBi

Beamwidth, Horizontal  $2^{\circ}$  Beamwidth, Vertical  $2^{\circ}$ 

Mechanical Specifications


**Compatible Mounting Pipe Diameter** 115 mm – 120 mm | 4.5 in – 4.7 in

Fine Azimuth Adjustment Range ±15°
Fine Elevation Adjustment Range ±5°

 Wind Speed, operational
 200 km/h
 | 124.274 mph

 Wind Speed, survival
 200 km/h
 | 124.274 mph

#### Antenna Dimensions and Mounting Information

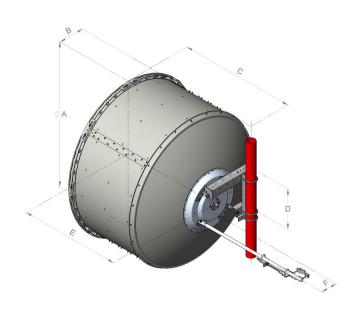

Dimensions in inches (mm)						
Antenna size, ft (m)	А	В	С	D	E	F
6 (1.8)	74.8 (1899)	13.4 (340)	59.8 (1520)	20.9 (530)	51.8 (1315)	8.4 (214)

#### Wind Forces at Wind Velocity Survival Rating

**Axial Force (FA)** 6960 N | 1,564.671 lbf

Angle  $\alpha$  for MT Max  $-130^{\circ}$ 

**Side Force (FS)** 2049 N | 460.634 lbf

**Twisting Moment (MT)**4948 N-m | 43,793.488 in lb

wisting wioment (wit) 4946 N-111 | 45,795.466 III II

Force on Inboard Strut Side 6187 N | 1,390.893 lbf

**Zcg without Ice** 498 mm | 19.606 in


**Zcg with 1/2 in (12 mm) Radial Ice** 689 mm | 27.126 in

**Weight with 1/2 in (12 mm) Radial Ice** 291 kg | 641.544 lb





#### Wind Forces at Wind Velocity Survival Rating Image

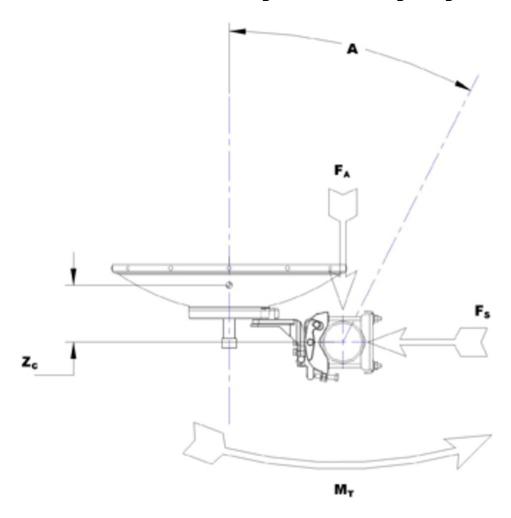

#### Packaging and Weights

 Height, packed
 2128 mm | 83.78 in

 Width, packed
 544 mm | 21.417 in

 Length, packed
 1895 mm | 74.606 in

ingth, packed 1895 mm | 74.606 in

Packaging TypeStandard packVolume2.194 m³ | 77.48 ft³

**Weight, gross** 150 kg | 330.693 lb

Weight, net
90 kg | 198.416 lb
Regulatory Compliance/Certifications



Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



#### \* Footnotes

Operating Frequency Band

Bands correspond with CCIR recommendations or common

allocations used throughout the world. Other ranges can be

accommodated on special order.

**Gain, Mid Band**For a given frequency band, gain is primarily a function of

antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

Boresite Cross Polarization Discrimination (XPD)

The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Front-to-Back Ratio

Denotes highest radiation relative to the main beam, at 180°

±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

**Return Loss**The figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

VSWR Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

Radiation Pattern Envelope Reference (RPE)

Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed

where the maximum antenna deflection is  $0.3\,\mathrm{x}$  the 3 dB beam width of the antenna. For other antennas, it is defined

as a deflection is equal to or less than 0.1 degrees.

Page 6 of 7



Wind Speed, survival

The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.

**Axial Force (FA)** 

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Side Force (FS)

Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

**Twisting Moment (MT)** 

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

**Packaging Type** 

Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wirebound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.

