

Fiber indoor cable, Single Jacket All-Dielectric, Gel-Free, 24 fiber, Indoor Stranded Microsheath Tube, Multimode OM5, Meters jacket marking, Lime green jacket color, Cca flame rating. Provides Rodent Resistance

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	L-LN


General Specifications

Cable Type	Stranded microsheath tube
Construction Type	Non-armored
Subunit Type	Gel-free
Filler, quantity	2
Jacket Color	Lime green
Jacket Marking	Meters
Jacket Marking Method	Inkjet
Jacket Marking Text	COMMSCOPE GB F.O. CABLE 760248053 12X 50/125 OM5 EN50575 CLASS C LSZH [SERIAL NUMBER] [METRE MARK]
Subunit, quantity	2
Fibers per Subunit, quantity	12
Total Fiber Count	24

Dimensions

Buffer Tube/Subunit Diameter	1.4 mm   0.055 in
Diameter Over Jacket	6.6 mm   0.26 in

Representative Image

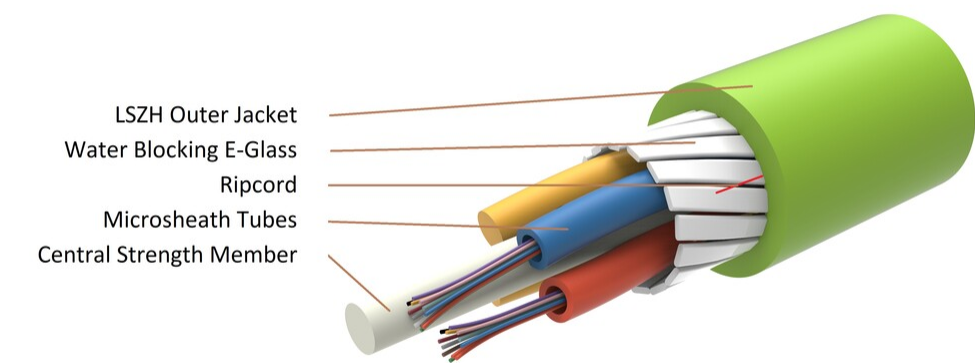

## Material Specifications

Inner Jacket Material

Low Smoke Zero Halogen (LSZH)

## Mechanical Specifications

Minimum Bend Radius, loaded	130 mm   5.118 in
Minimum Bend Radius, unloaded	90 mm   3.543 in
Tensile Load, long term, maximum	850 N   191.088 lbf
Tensile Load, short term, maximum	1450 N   325.973 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Impact	2 N-m   17.701 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Vertical Rise, maximum	1000 m   3,280.84 ft

## Optical Specifications

Fiber Type

OM5, LazrSPEED® wideband

## Environmental Specifications

Installation temperature	0 °C to +50 °C (+32 °F to +122 °F)
Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-1-2
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)

Environmental Test Specifications

Cable Freeze	-2 °C   28.4 °F
Cable Freeze Test Method	FOTP-98   IEC 60794-1 F15
Temperature Cycle	-10 °C to +60 °C (+14 °F to +140 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	52 kg/km   34.942 lb/kft
--------------	--------------------------

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ROHS	Compliant
UK-ROHS	Compliant



Included Products

- CS-5G-LT
- LazrSPEED® OM5 WideBand Multimode Fiber

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

## LazrSPEED® OM5 WideBand Multimode Fiber

### LazrSPEED® 550

#### Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

#### General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±5 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	254 µm
Coating Diameter (Uncolored)	242 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating Diameter Tolerance (Uncolored)	±5 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

#### Mechanical Specifications

Macrobending, 15 mm Ø mandrel, 2 turns	0.20 dB @ 850 nm   0.50 dB @ 1,300 nm
Macrobending, 30 mm Ø mandrel, 2 turns	0.10 dB @ 850 nm   0.30 dB @ 1,300 nm
Macrobending, 75 mm Ø mandrel, 100 turns	0.50 dB @ 1,300 nm   0.50 dB @ 850 nm
Coating Strip Force, maximum	4.5 N   1.012 lbf
Coating Strip Force, minimum	0.9 N   0.202 lbf
Dynamic Fatigue Parameter, minimum	18

#### Optical Specifications

Numerical Aperture	0.2
--------------------	-----

# CS-5G-LT

Numerical Aperture Tolerance	±0.010
Point Defects, maximum	0.15 dB
Zero Dispersion Slope, maximum (OM5)	-412/(840(1-(λ0/840)^4)) ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1328 nm
Zero Dispersion Wavelength, minimum	1297 nm

## Optical Specifications, Wavelength Specific

1 Gbps Ethernet Distance	1,110 m @ 850 nm   600 m @ 1,300 nm
10 Gbps Ethernet Distance	550 m @ 850 nm
Attenuation, maximum	1.00 dB/km @ 1,300 nm   2.20 dB/km @ 953 nm   3.00 dB/km @ 850 nm
Bandwidth, Laser, minimum	2,600 MHz-km @ 953 nm   4,700 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,950 MHz-km @ 953 nm   3,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Index of Refraction	1.478 @ 1,300 nm   1.483 @ 850 nm
Standards Compliance	ANSI/TIA-492AAAF (OM5)   ANSI/TIA-568.3 (OM5)   IEC 60793-2-10, A1 (OM5)   ISO/IEC 11801-1 cabled optical fiber performance category OM5

## Environmental Specifications

Heat Aging, maximum	0.10 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.1 dB/km
Water Immersion, maximum	0.10 dB/km @ 23 °C

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity